

The OML logo is displayed in a clean, white, sans-serif font against a dark, textured background. The letters are bold and modern, with a registered trademark symbol (®) to the upper right of the 'L'.

OML[®]

OFFICE LIGHTING SERIES
CATALOGUE 2024






KEEP Moving
Forward
2004
2024

OML[®]
COMMERCIAL LIGHTING

CATALOGUE
2024

01

Grille series

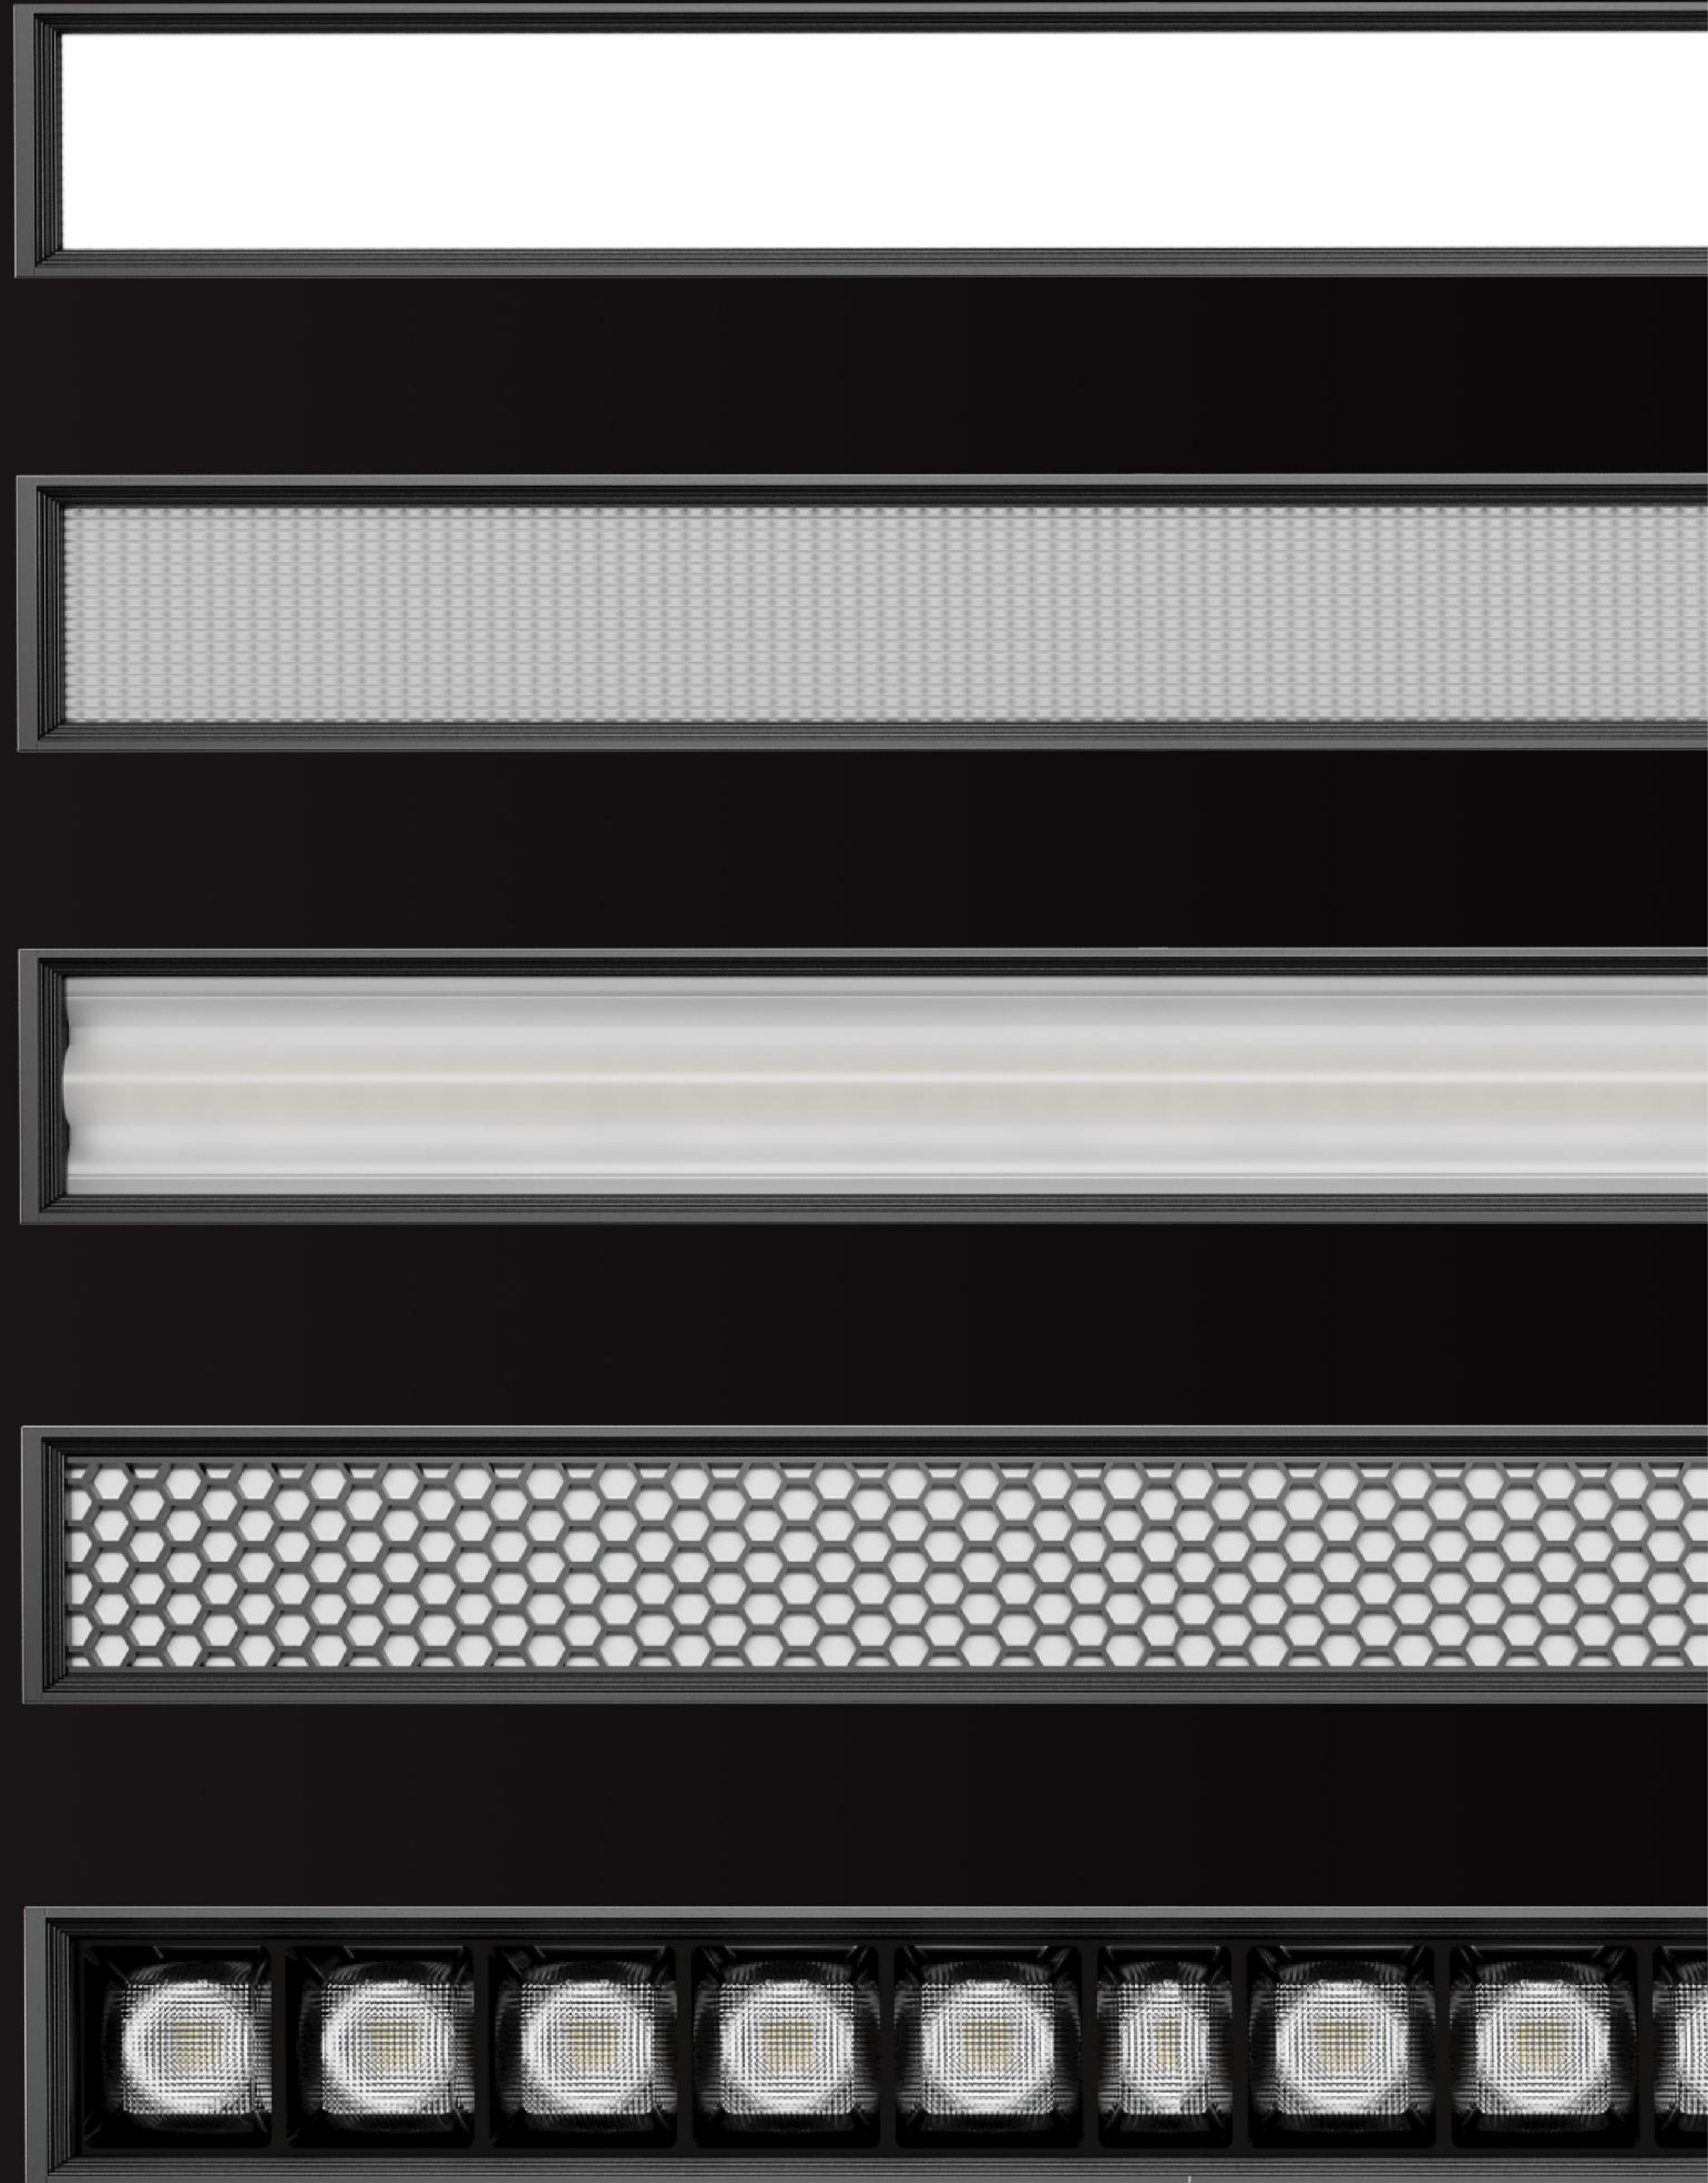

HANGING LINEAR LIGHT




PRODUCTION OPTIONS

W15

Model: OML-XXASL-015040AR


Size : 1145*15*H40MM
Power : 24W
CRI : ≥ 90
Beam angle : 24°/36°

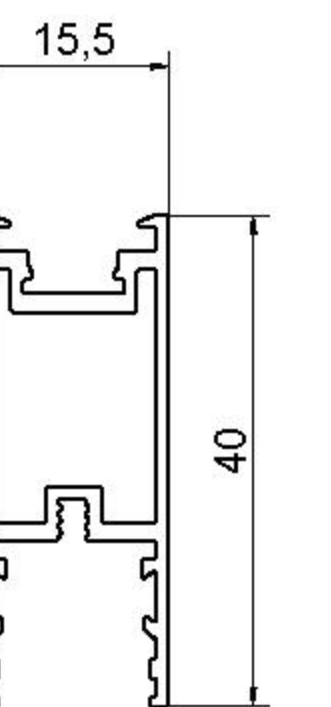

W18

Model: OML-XXDSL-018088BR


Size : L1130*W18*H88MM
Power : 20W/20+10W
CRI : ≥ 90
Beam angle : 24°/36°

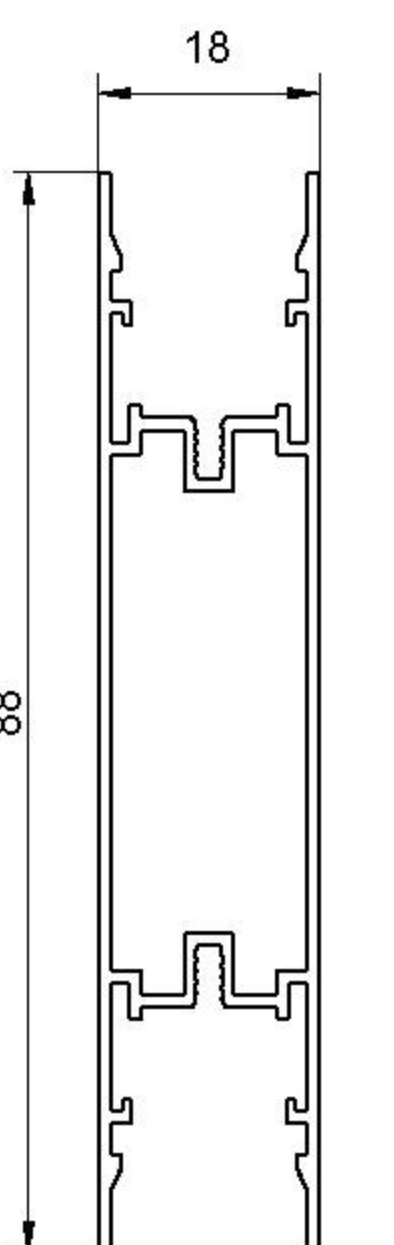

W25

Model: OML-XXESL-025080AA


Size : 1146*25*H80MM
Power : 30+10W
CRI : ≥ 90
Beam angle : 24°/36°/110°

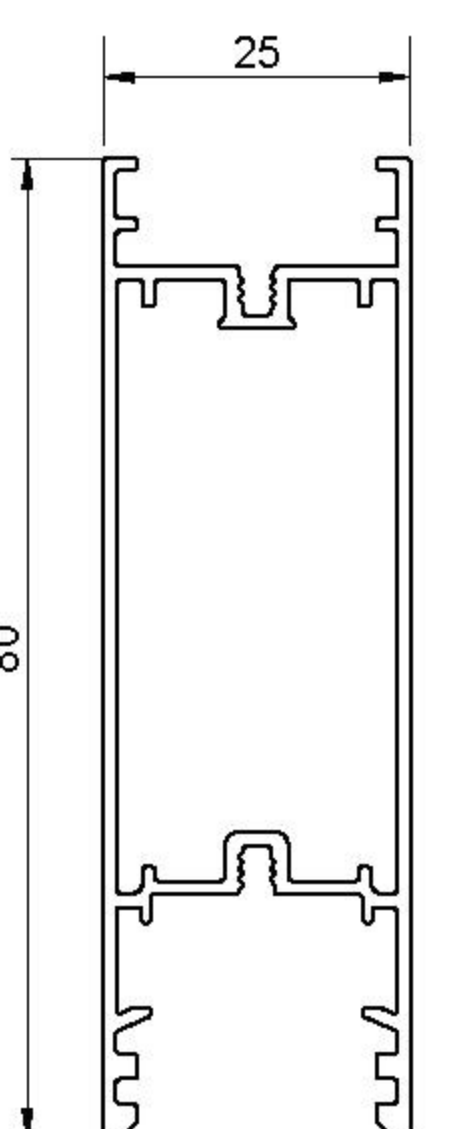

02

Floodlight Series

HANGING LINEAR LIGHT

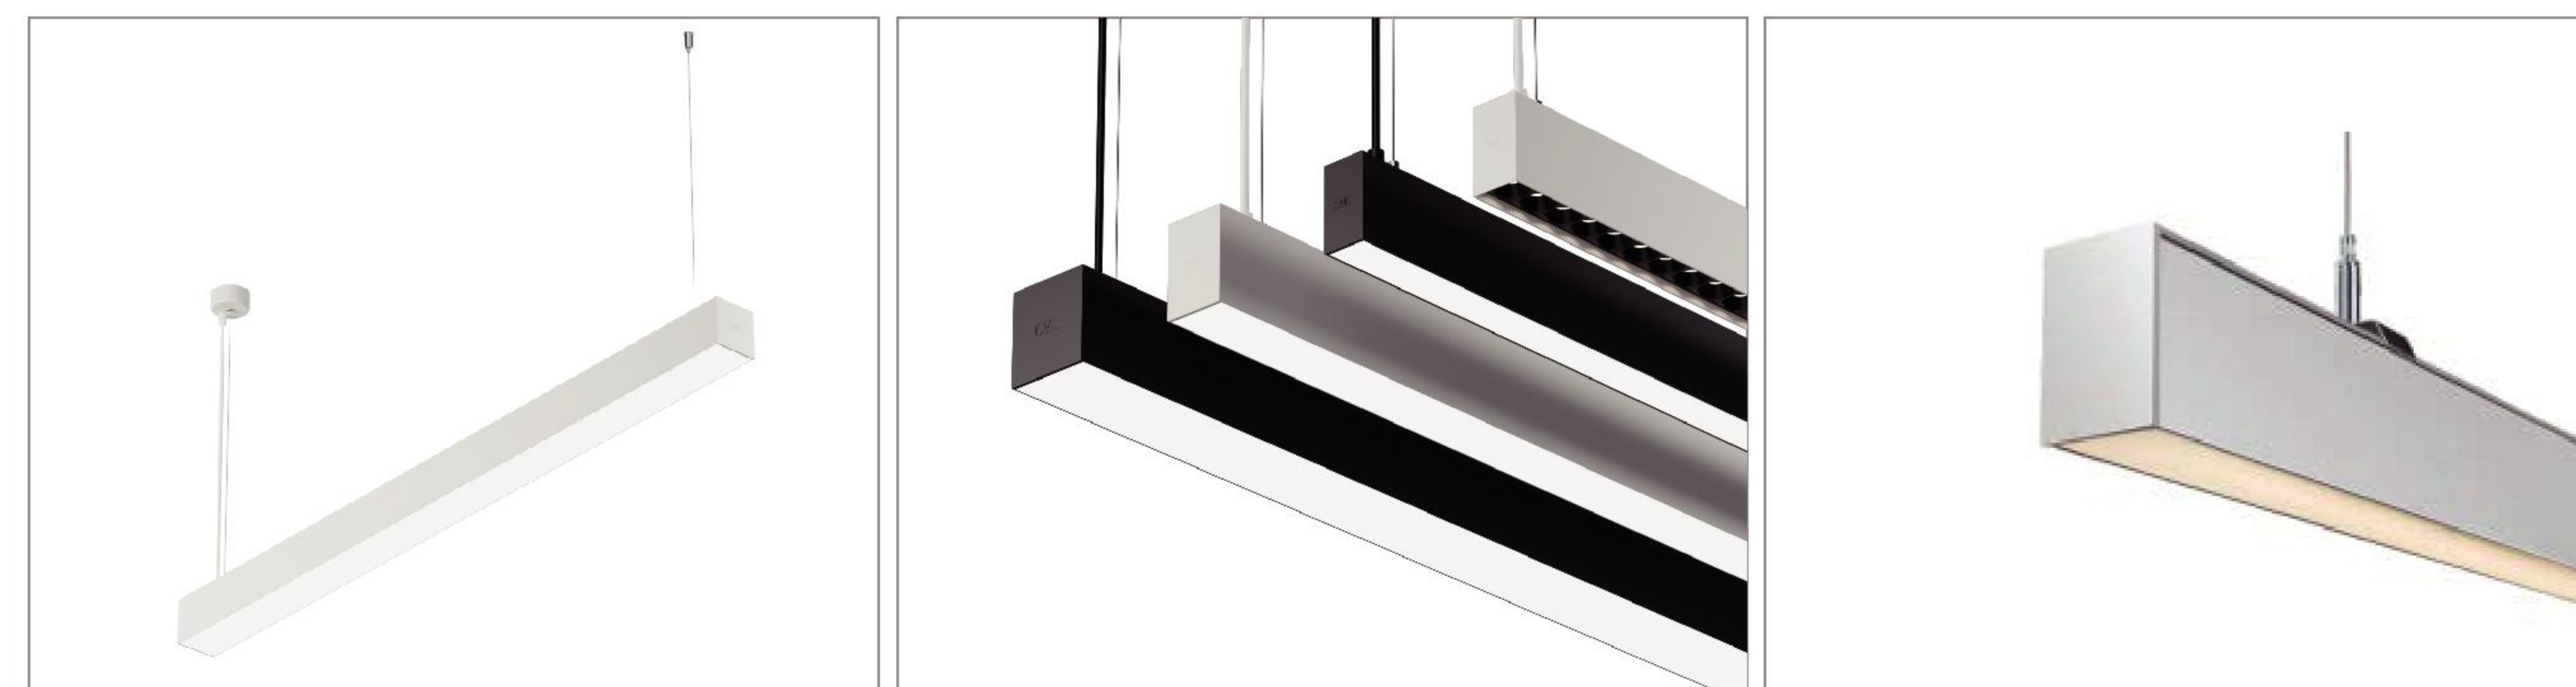


PRODUCTION OPTIONS

W25

Model: OML-XXESL-025080AA


Size: 1146*25*H80MM
Power: 30+10W
CRI: ≥ 90
Beam angle: 24°/36°/110°

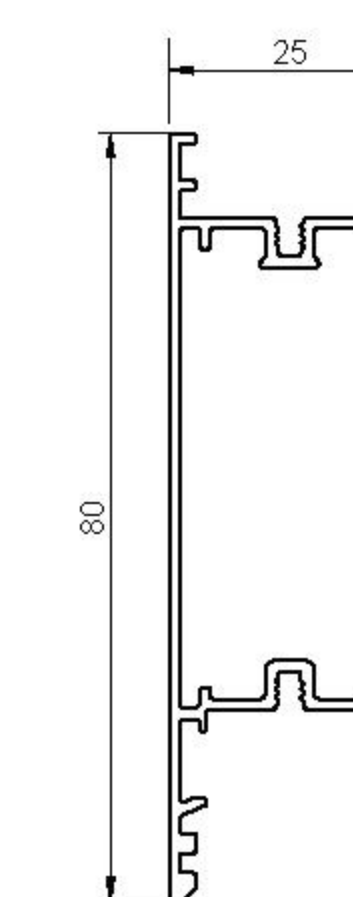

W50

Model: OML-XXASL-050075BE


Size: 1130*50*75MM
Power: 30+10W
CRI: ≥ 90
Beam angle: 110°

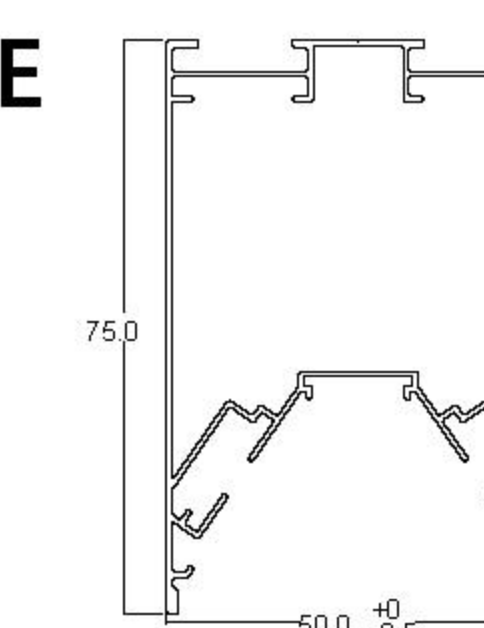

W35

Model: OML-XXASL-035085BE


Size: 1130*35*85MM
Power: 30+10W
CRI: ≥ 90
Beam angle: 110°

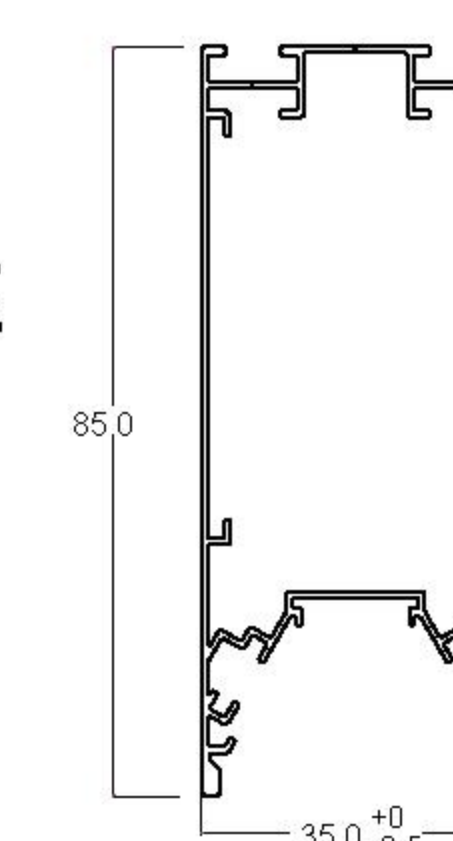

W60

Model: OML-XXASL-060080AA


Size: 1132*60*80MM
Power: 40W
CRI: ≥ 90
Beam angle: 110°

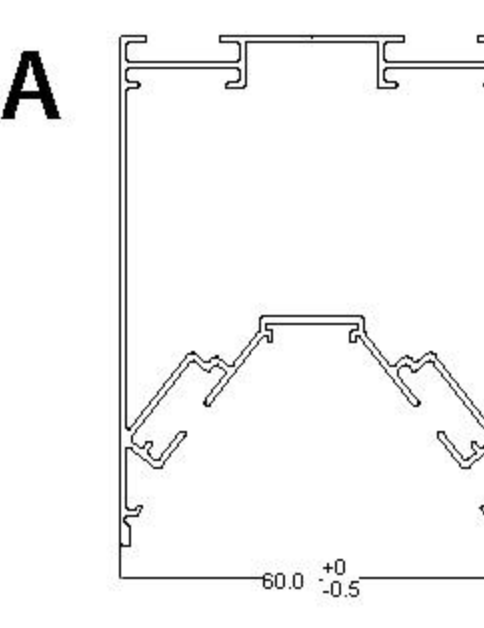



W45

Model: OML-XXASL-045070AA






Size: 1132*45*70MM
Power: 30W
CRI: ≥ 90
Beam angle: 110°

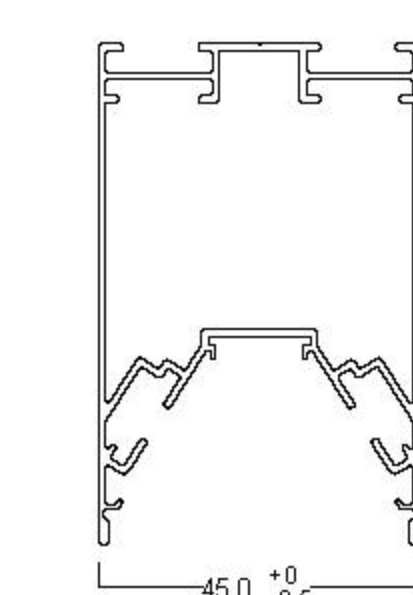

EMBEDDED LINEAR LIGHT CONNECTOR

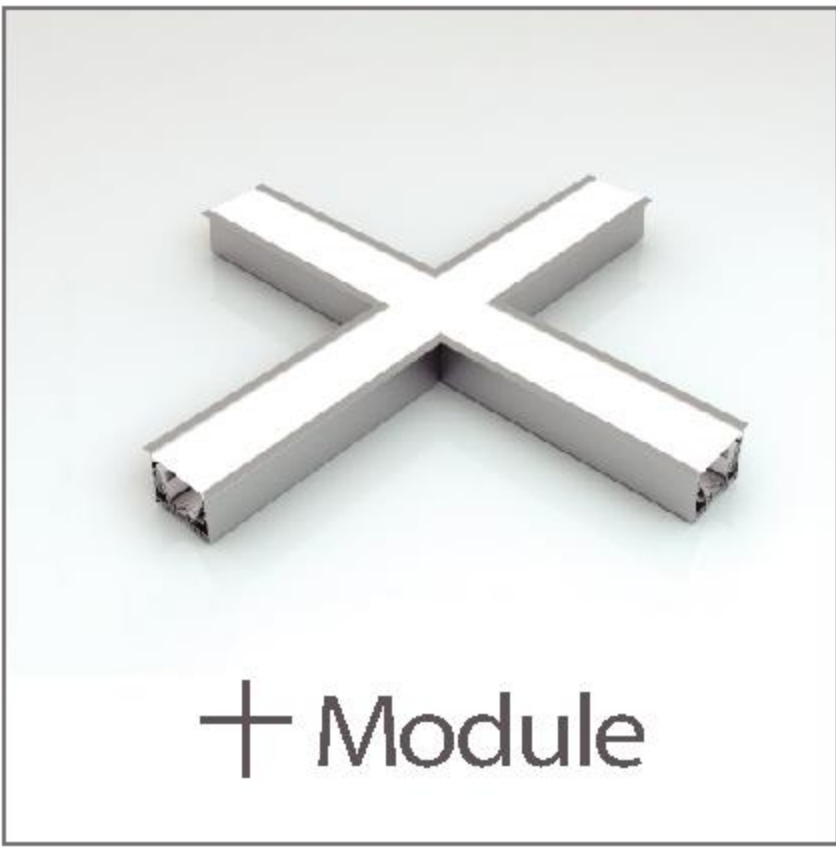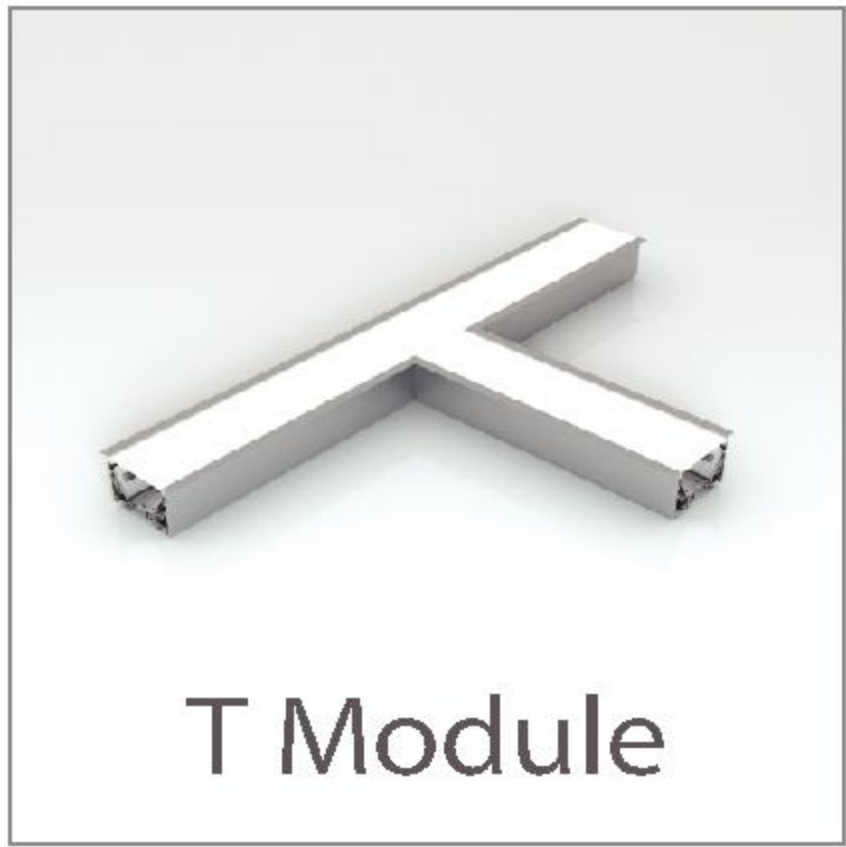


HANGING LINEAR LIGHT CONNECTOR

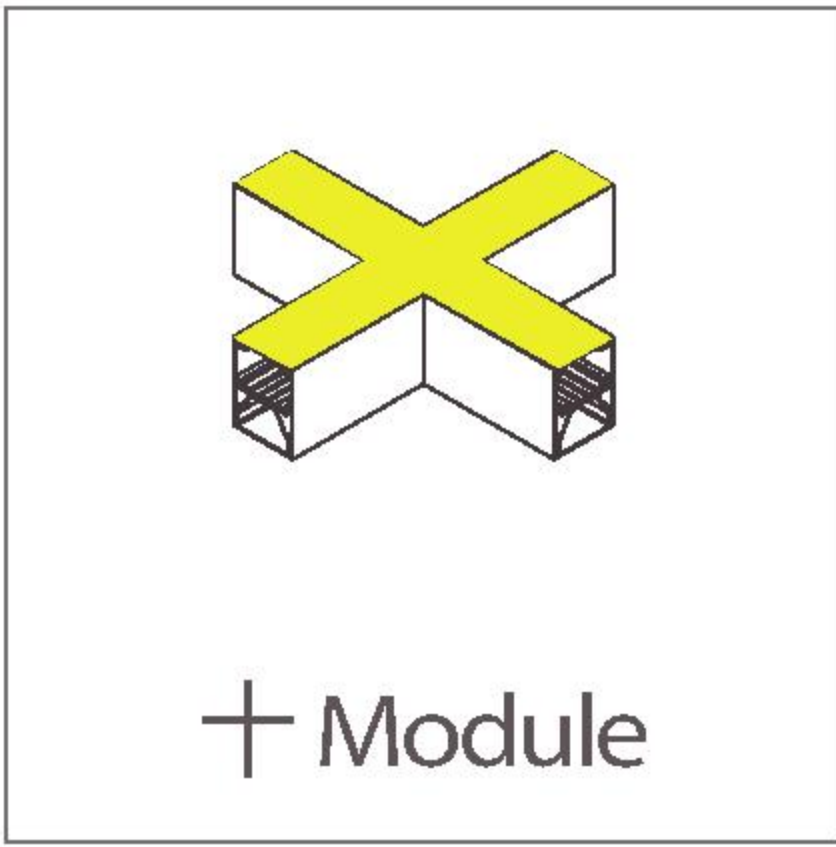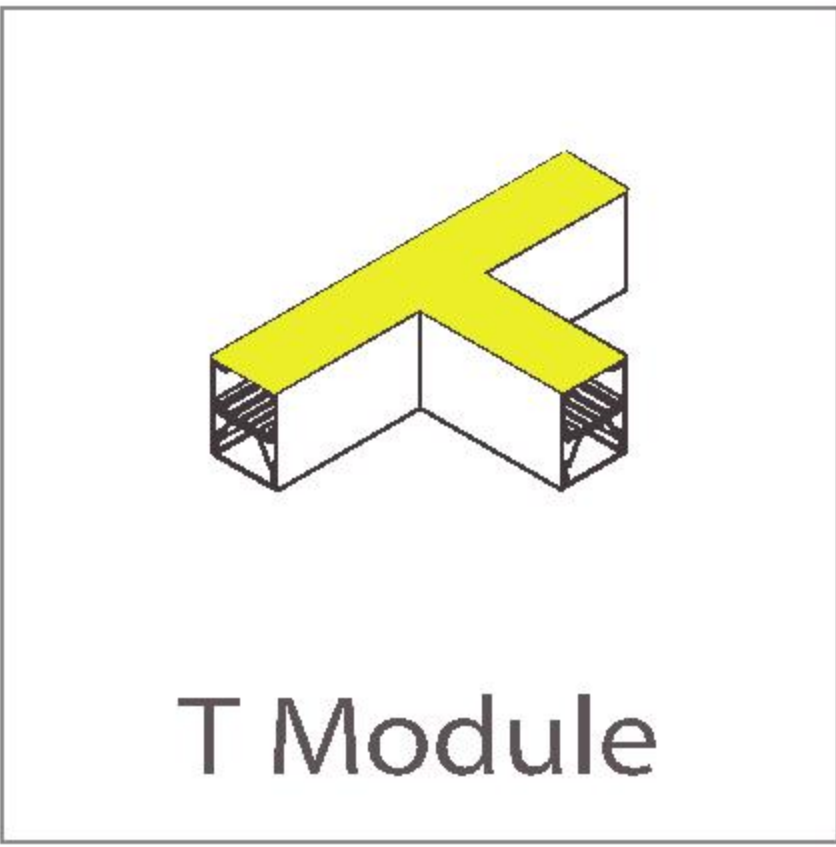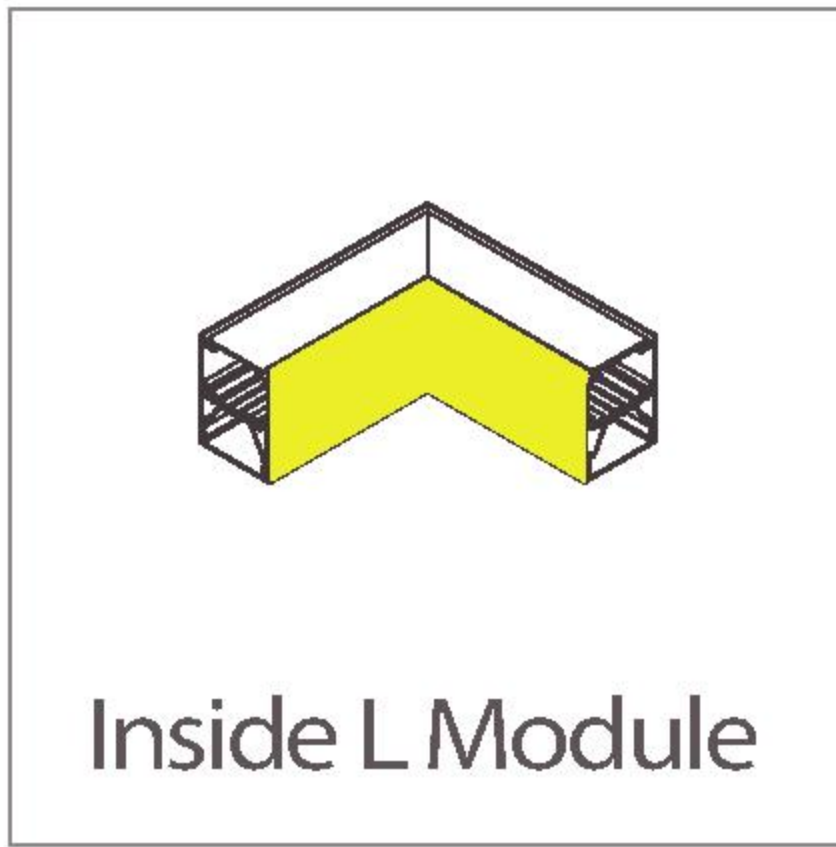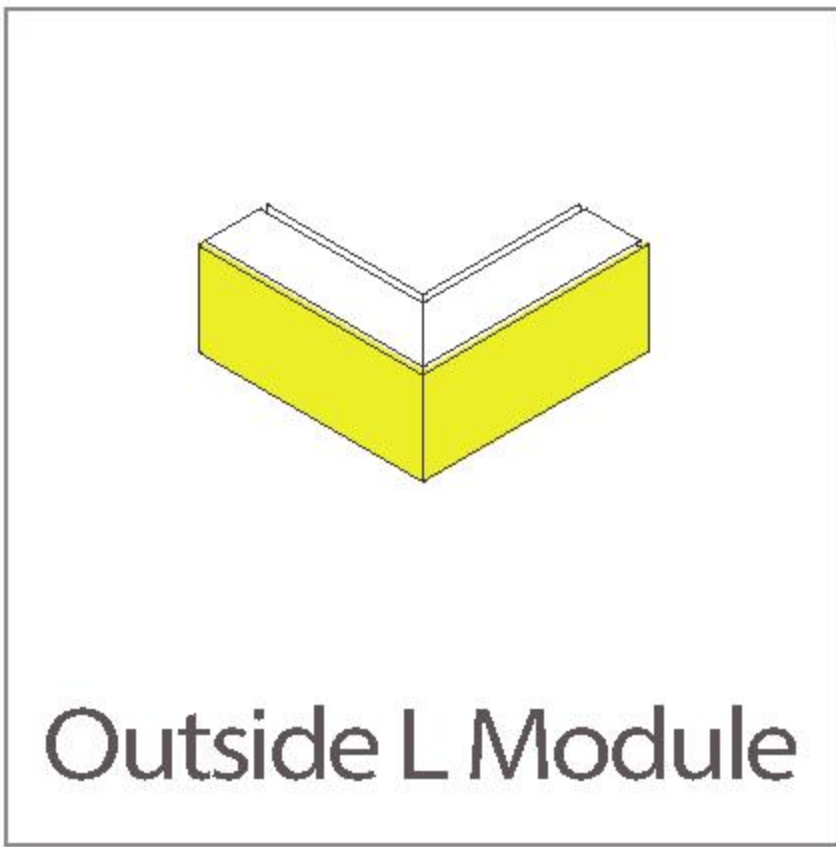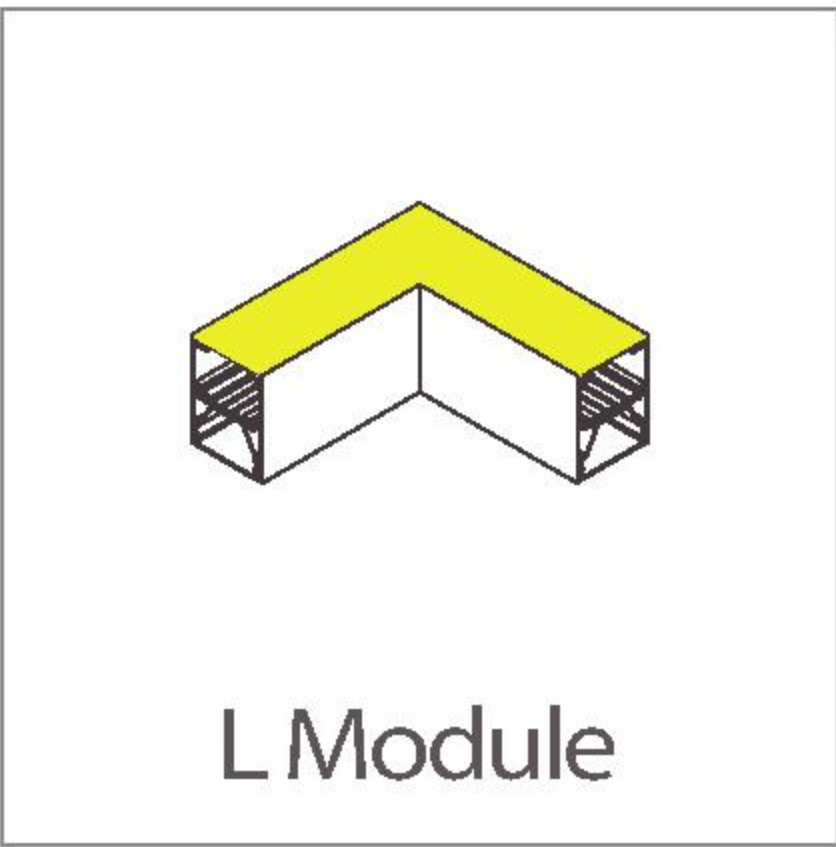


PRODUCTION OPTIONS

CRI : ≥ 90
Beam angle : 110°

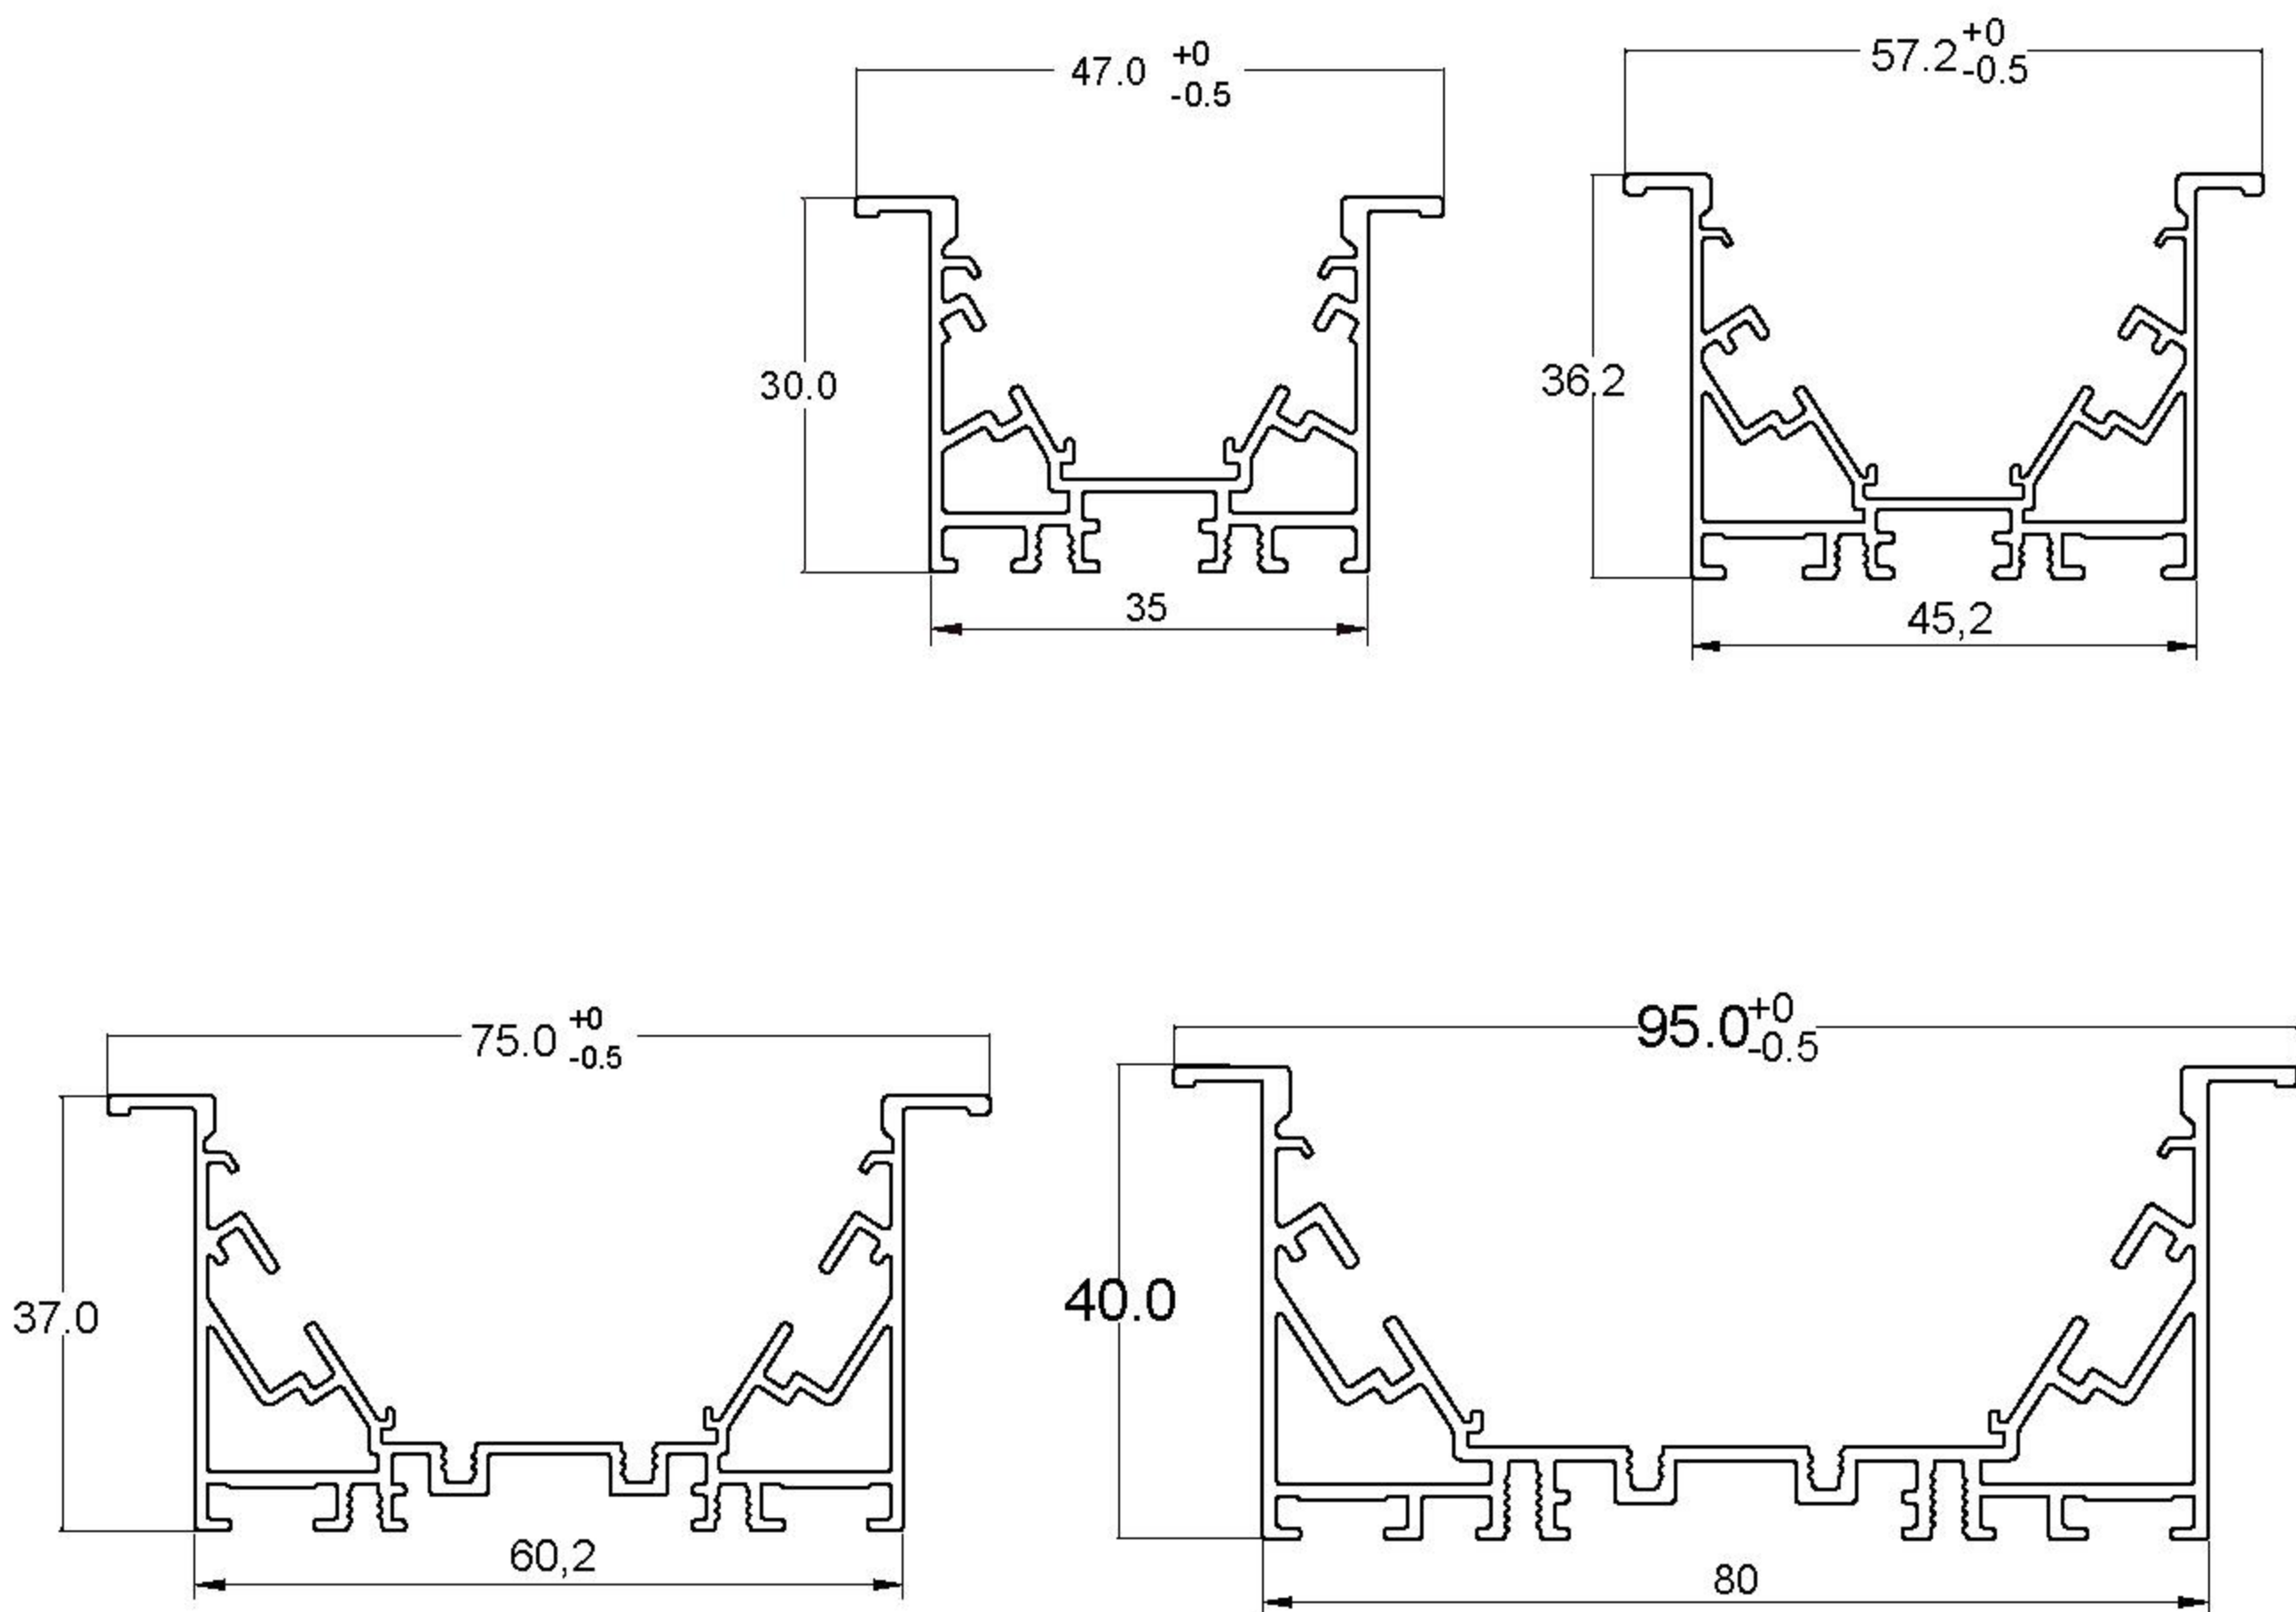

PRODUCTION OPTIONS

CRI : ≥ 90
Beam angle : 110°

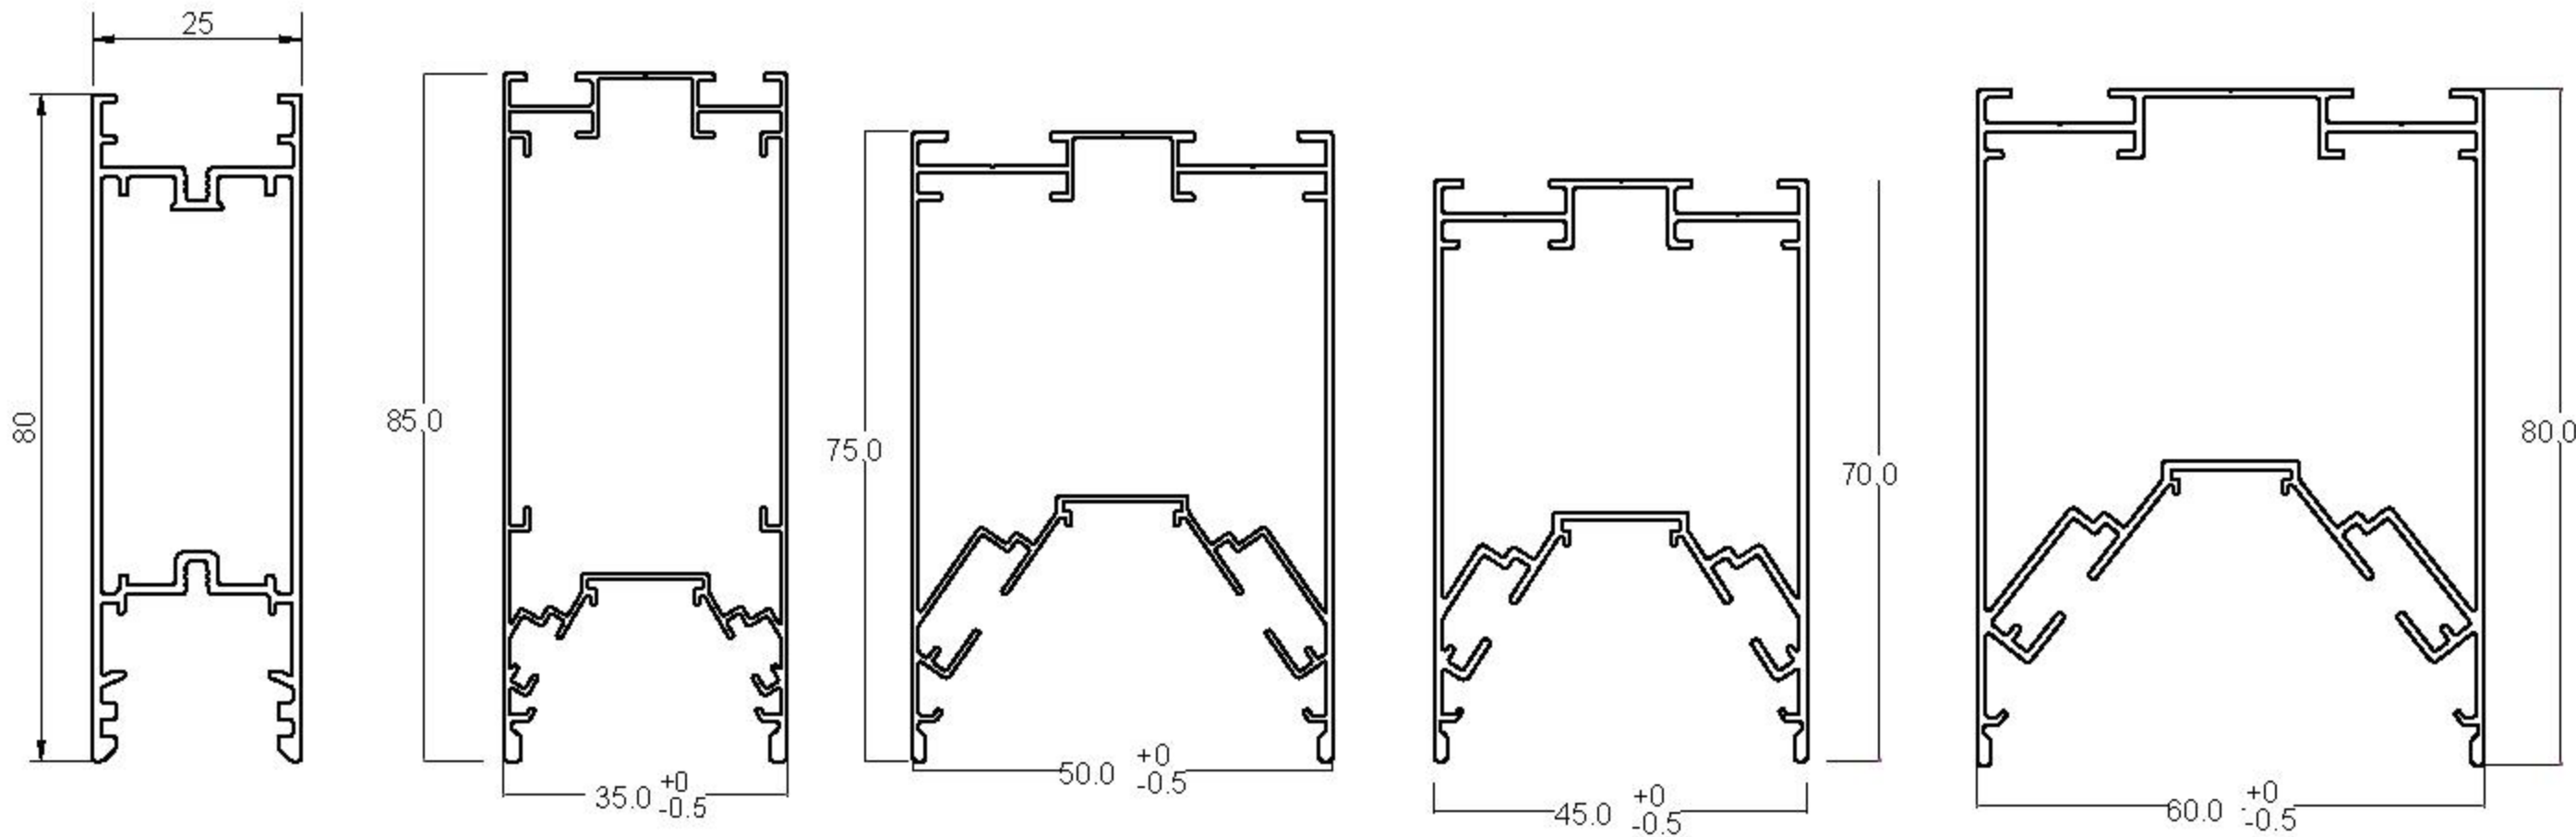

03

Embedded Light
Collection

EMBEDDED LIGHTS




PRODUCTION OPTIONS

W47

Model: OML-XXAEL-047030BA


Size : 1145*47*30MM/2270*47*30MM
Power : 15W/30W
CRI : ≥ 90
Beam angle : 110°

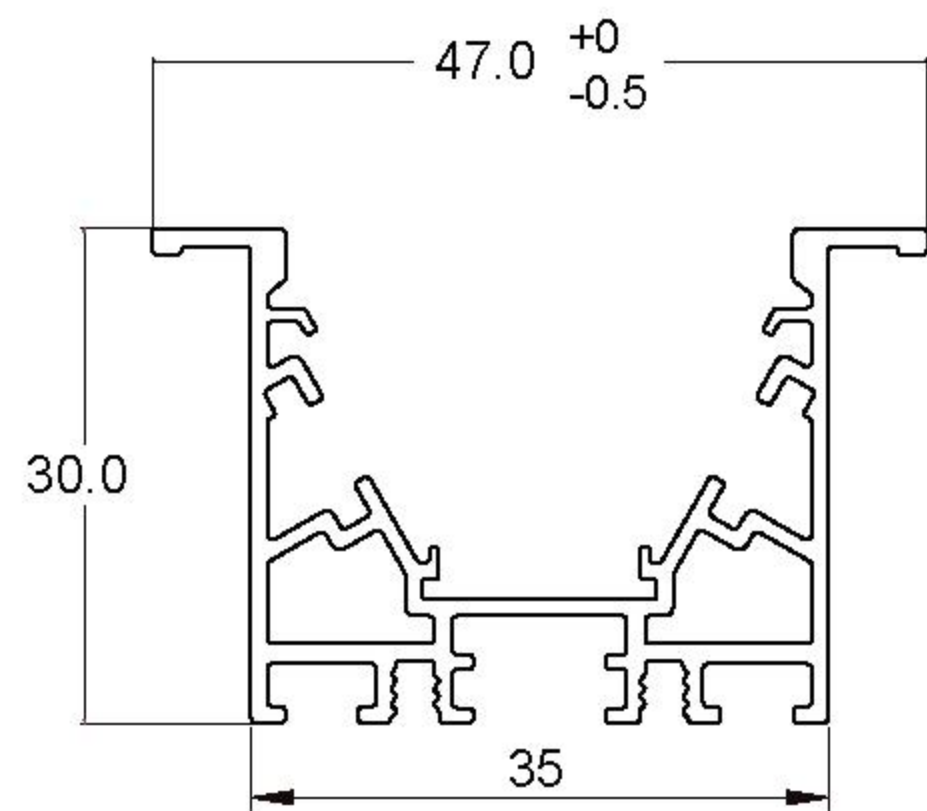

W57

Model: OML-XXAEL-057036BA


Size : 1145*57*36MM/2270*57*36MM
Power : 20W/40W
CRI : ≥ 90
Beam angle : 110°

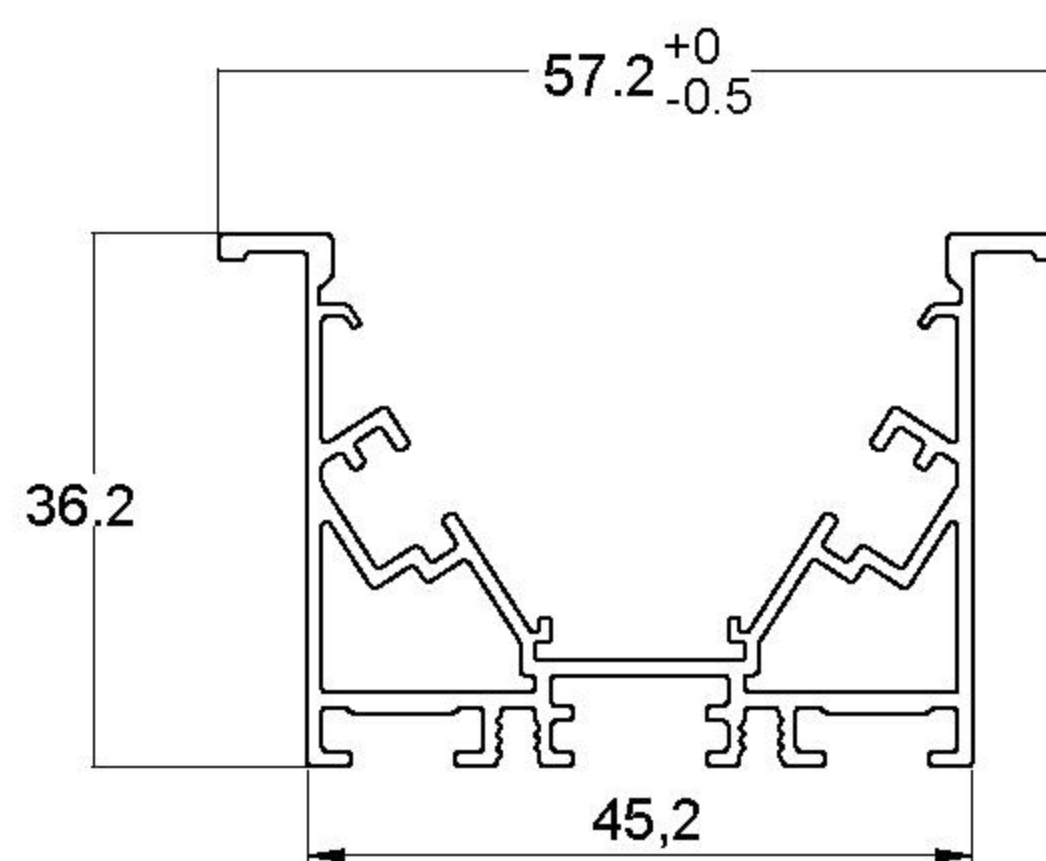

W75

Model: OML-XXAEL-075037BA


Size : 1147*75*37MM/2272*75*37MM
Power : 30W/60W
CRI : ≥ 90
Beam angle : 110°

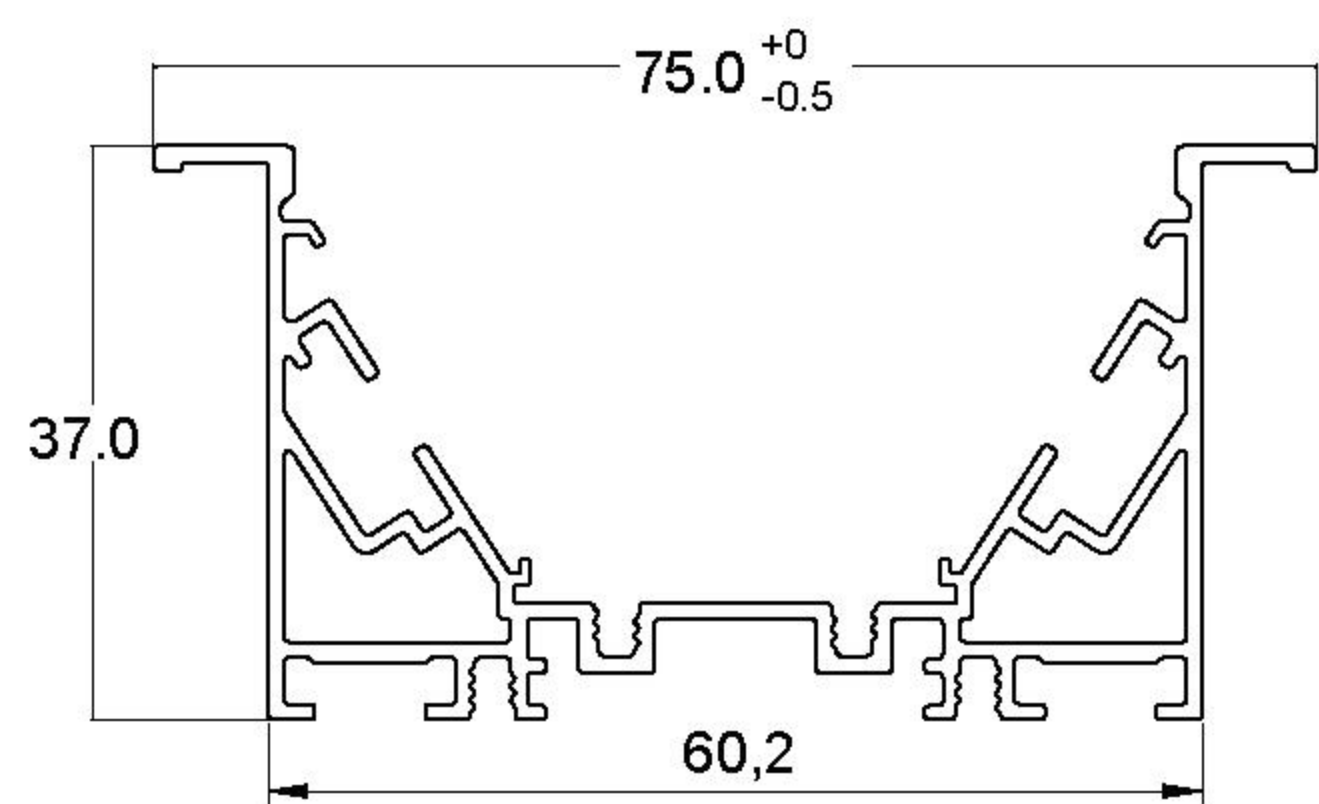

W95

Model: OML-XXAEL-095040BA

Size : 1147*95*40MM/2272*95*40MM
Power : 40W/80W
CRI : ≥ 90
Beam angle : 110°

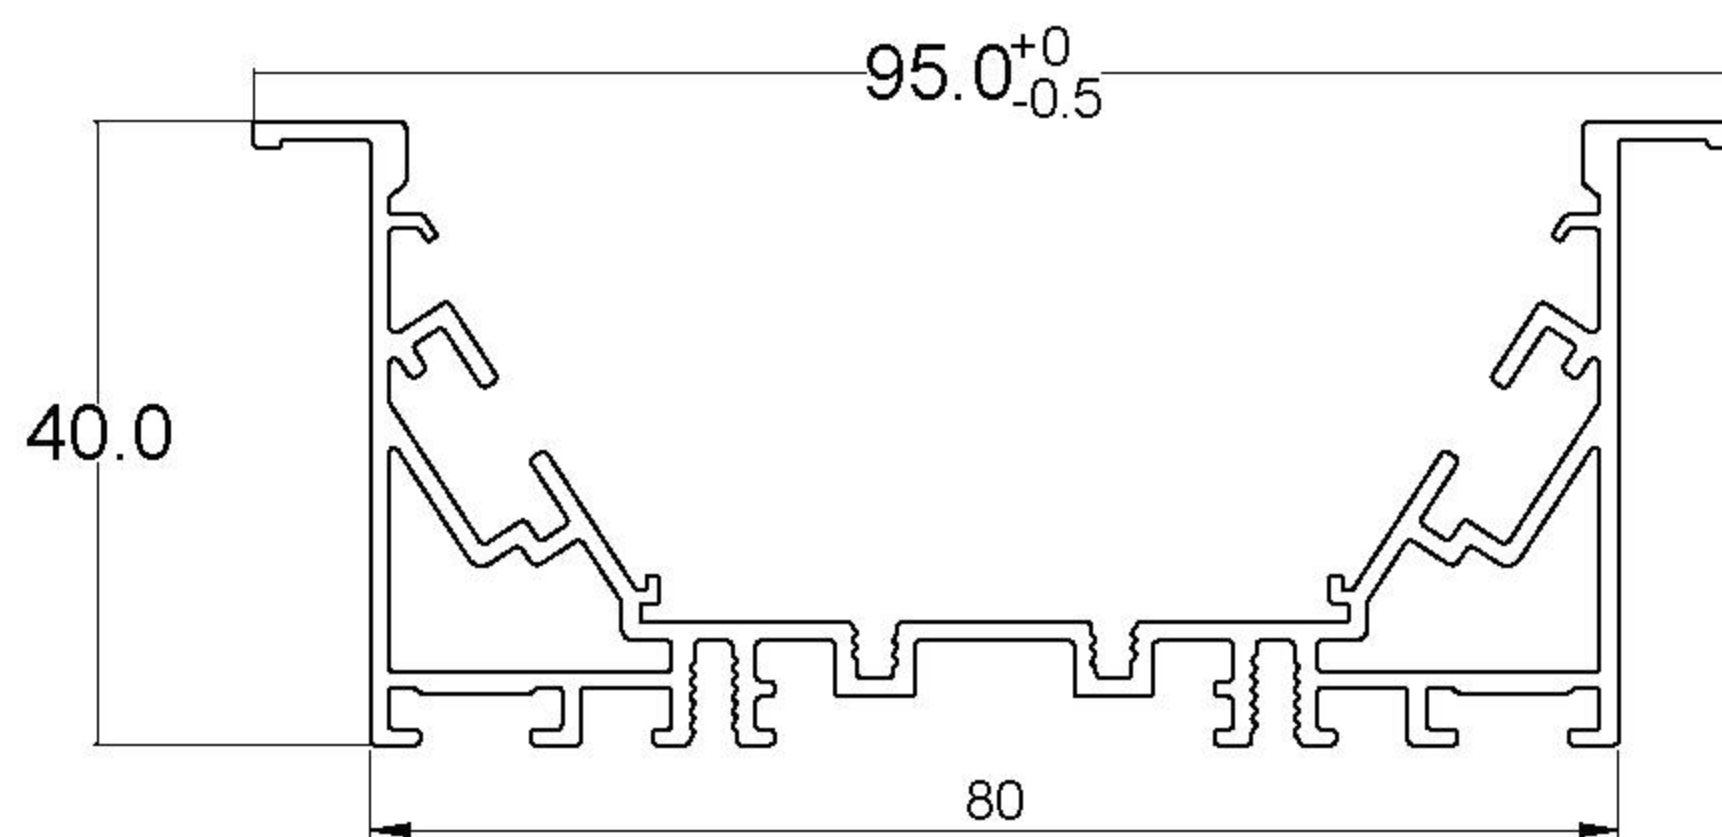

04

Baffle Linear Light

BAFFLE LINEAR LIGHT




PRODUCTION OPTIONS

W70

Model: OML-XXASL-070040AC

Size: L1200*W70*H40MM
Power: 24W
CRI: ≥ 90
Beam angle: 110°

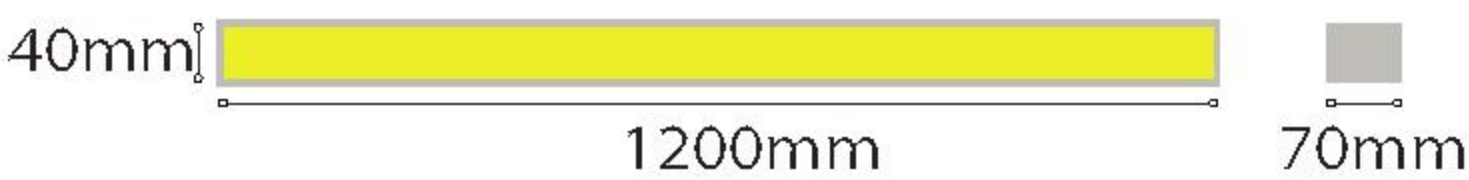

W100

Model: OML-XXASL-100040AC

Size: L1200*W100*H40MM
Power: 30W
CRI: ≥ 90
Beam angle: 110°



BAFFLE LINEAR LIGHT



PRODUCTION OPTIONS

W150 Model: OML-XXASL-150040AC

Size: L1200*W150*H40MM
Power: 36W
CRI: ≥ 90
Beam angle: 110°



W200 Model: OML-XXASL-200040AC

Size: L1200*W200*H40MM
Power: 48W
CRI: ≥ 90
Beam angle: 110°



BAFFLE LINEAR LIGHT



PRODUCTION OPTIONS

W90 Model: OML-XXAEL-09040AC

Size: L1200*W90*H40MM
Power: 24W
CRI: ≥ 90
Beam angle: 110°



W120 Model: OML-XXAEL-12040AC

Size: L1200*W120*H40MM
Power: 36W
CRI: ≥ 90
Beam angle: 110°




05

Ultra -narrow series





M10 SYSTEM TRACK TYPE


STANDARD TRACKS

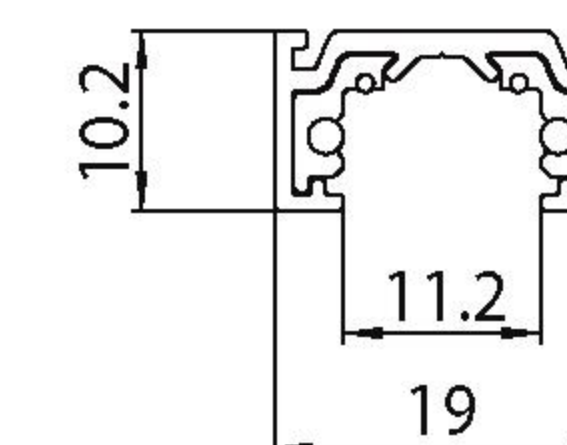


TRIMLESS TRACK

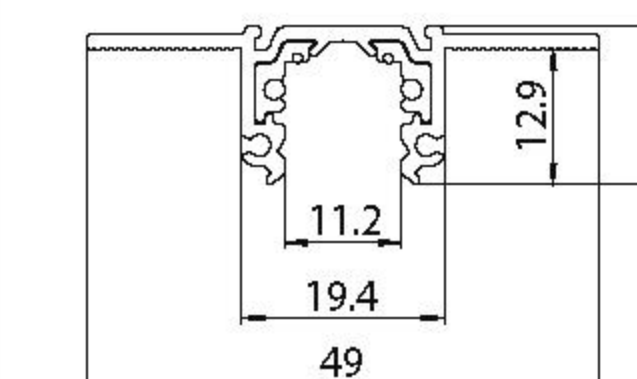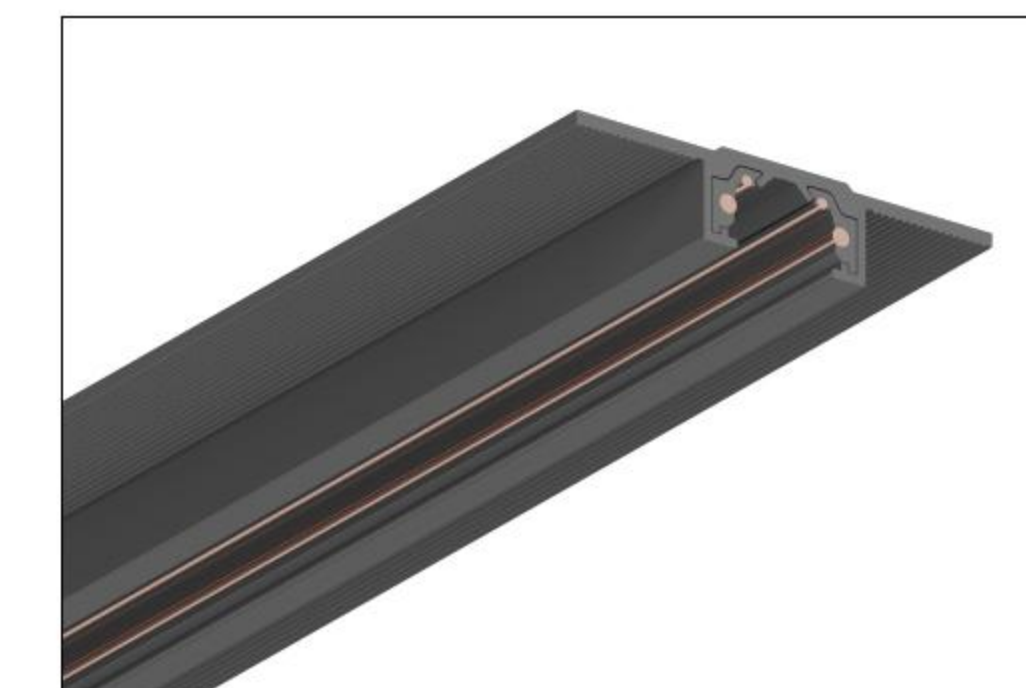


DOUBLE EMISSION TRACKS

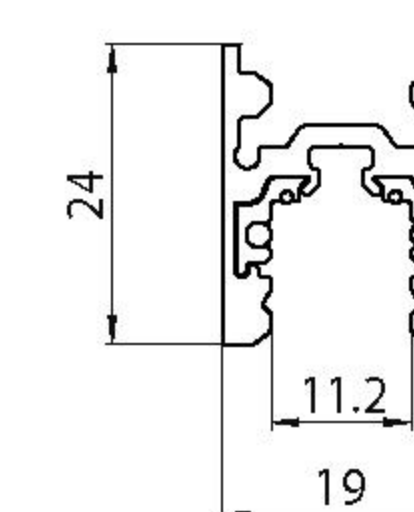


CURVED TRACK

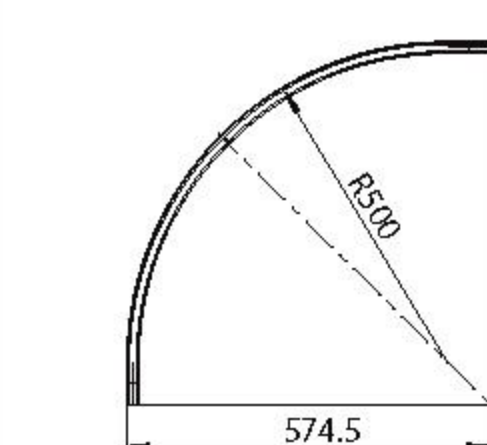


LED LIGHT

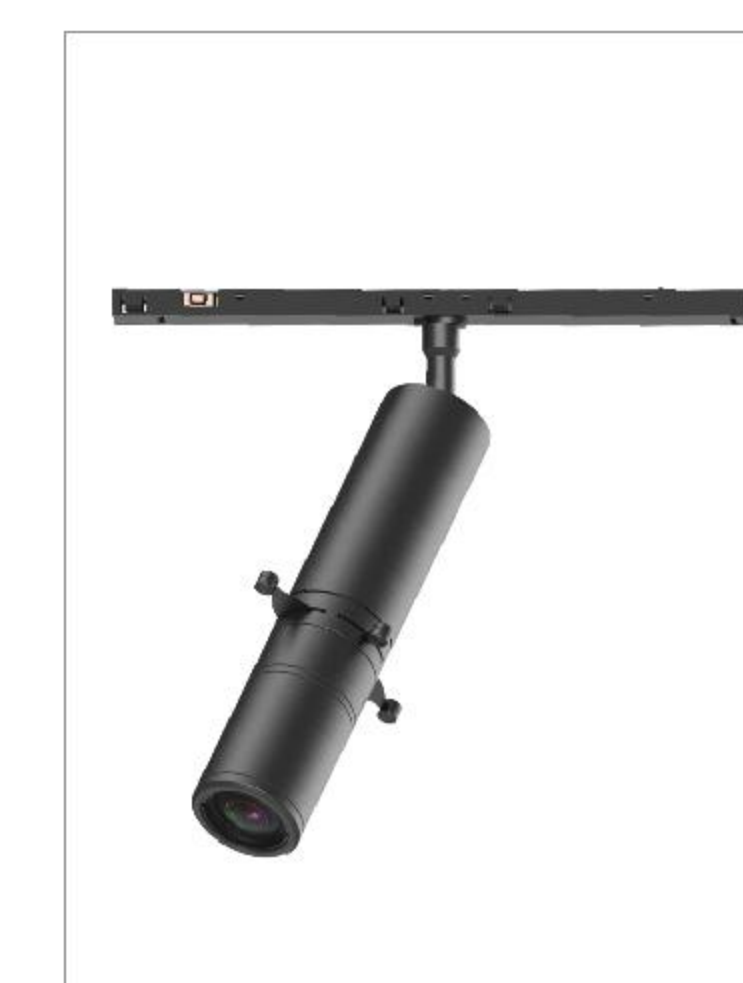

M10
CUTTING LIGHT

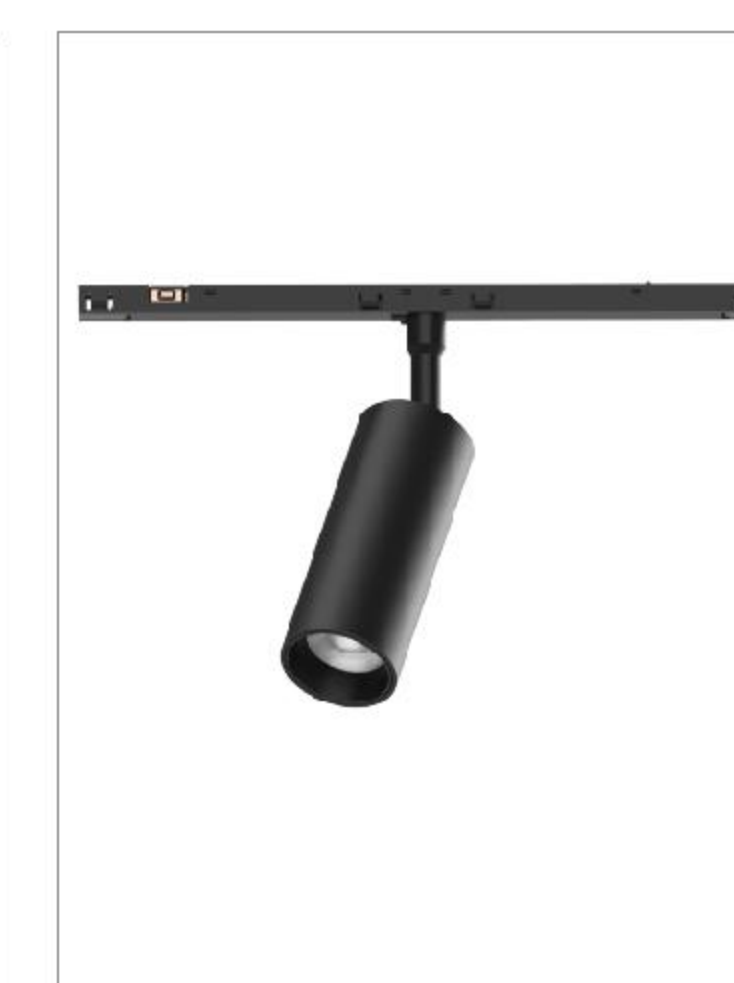


M10
45TRACK LIGHTING

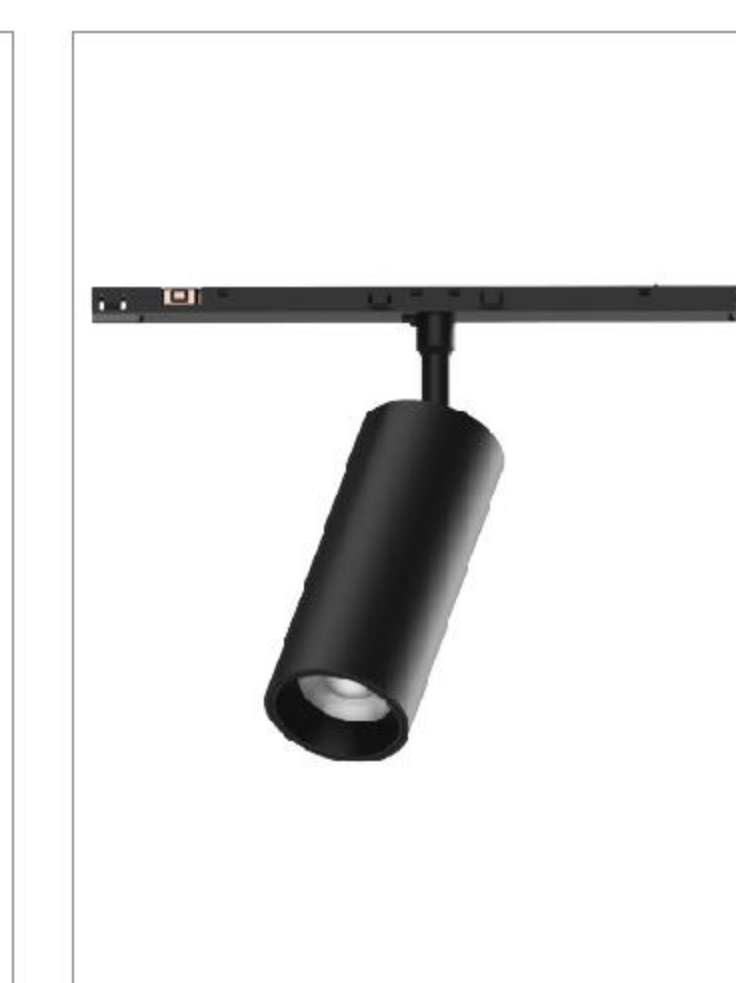

M10
55TRACK LIGHTING



M10
DOUBLE OUT OF LIGHT

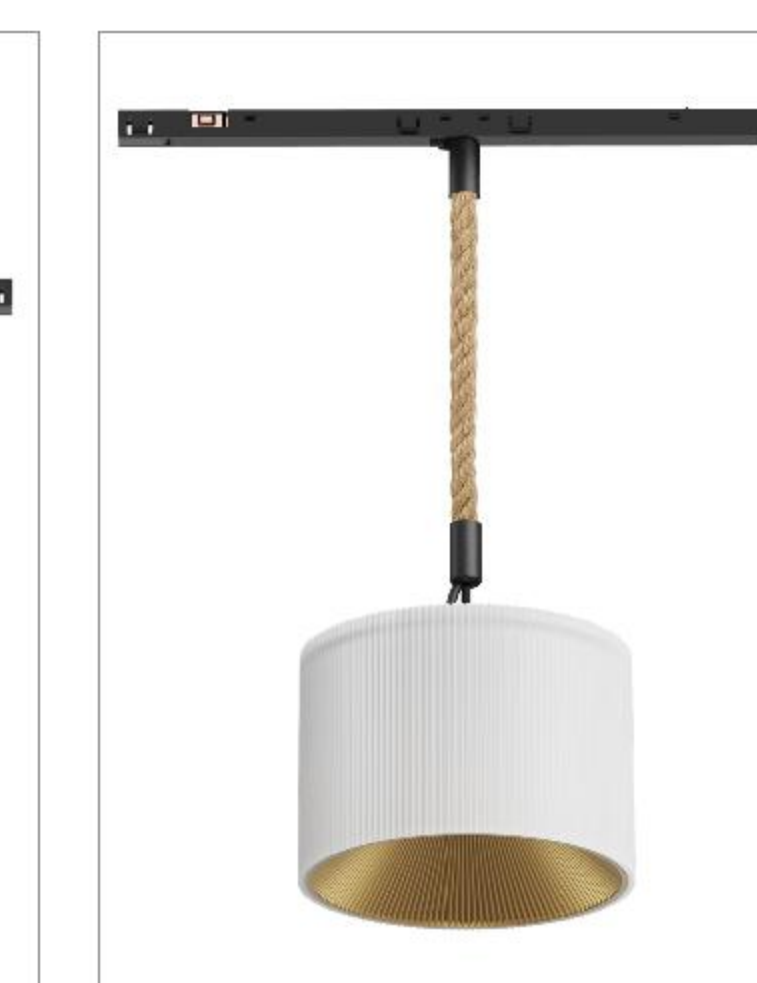

M10
HANGING DOUBLE LIGHT

M10 -6 -headed grid lamp

M10 -12 -headed grid lamp

M10 -300 pan -light light

M10 -600 pan -light light

M10 -900 pan -light light

M10 -1200 pan -light light

06

Ultra -thin series



ULTRA -THIN SERIES



PRODUCTION OPTIONS

W25

Size: L120*W24*H26MM
Beam angle: 24°/36°
Color: Black / White

W25

Size: L236*W24*H26MM
Beam angle: 90°
Color: Black / White

W25

Size: L236*W24*H26MM
Beam angle: 24°/36°
Color: Black / White

W25

Size: L300*W24*H25MM
Color: Black / White

W25

Size: L120*W24*H26MM
Beam angle: 90°
Color: Black / White

W25

Size: L600*W24*H25MM
Color: Black / White

ULTRA -THIN SERIES



PRODUCTION OPTIONS

W25

Model: OML-2002A-G1-180
Size: D180*H35MM
Power: 18W
CRI: >90
Beam angle: 120°
Color: Black/White /Chrome

W25

Model: OML-2002A-B1-40
Size: D43*H400MM
Power: 5W
CRI: >90
Beam angle: 18°/24°/40°/60°
Color: Black/White /Chrome

W25

Model: OML-2002A-B2-130
Size: D130*H76MM
Power: 5W
CRI: >90
Beam angle: 18°/24°/40°/60°
Color: Black/White /Chrome

ULTRA -THIN SERIES



PRODUCTION OPTIONS

10W

Beam angle: 24°/36°
color: Black / White

20W

Beam angle: 24°/36°
color: Black / White

10W

Beam angle: 24°/36°
color: Black / White

07

Magnetic Track Lighting



MAGNETIC TRACK MODULE




PRODUCTION OPTIONS

R20


Model: OML-DGTEL-060049AR-BZK

Size: L*60*49MM
Power: DC48W
Installation: Frameless

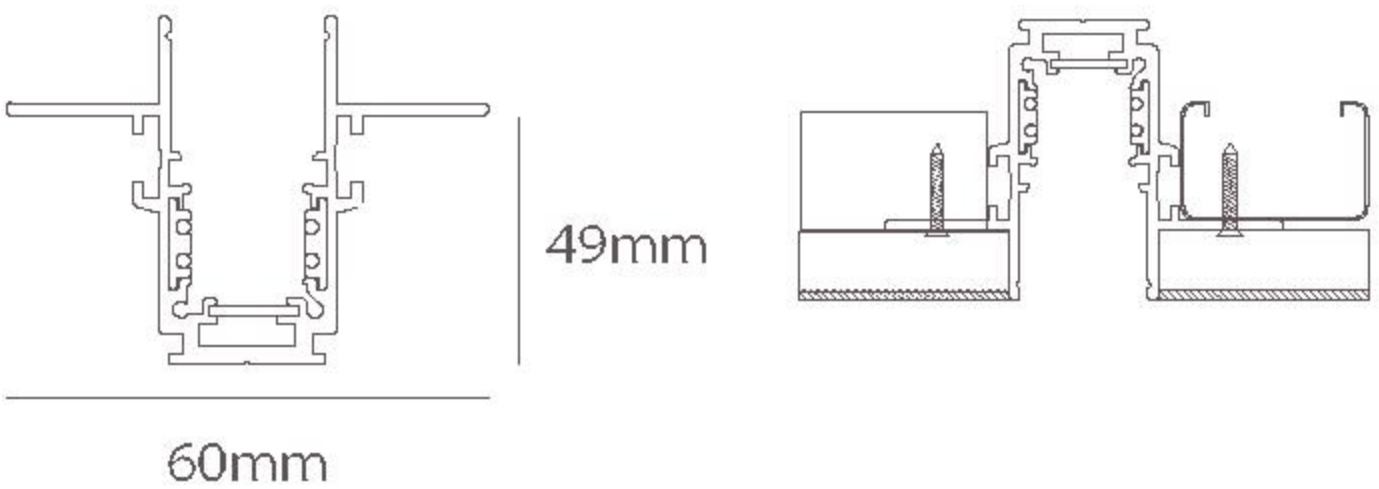

Model: OML-DGTEL-028054AR-BZK

Size: L*28*54MM
Power: DC48W
Installation: Surface

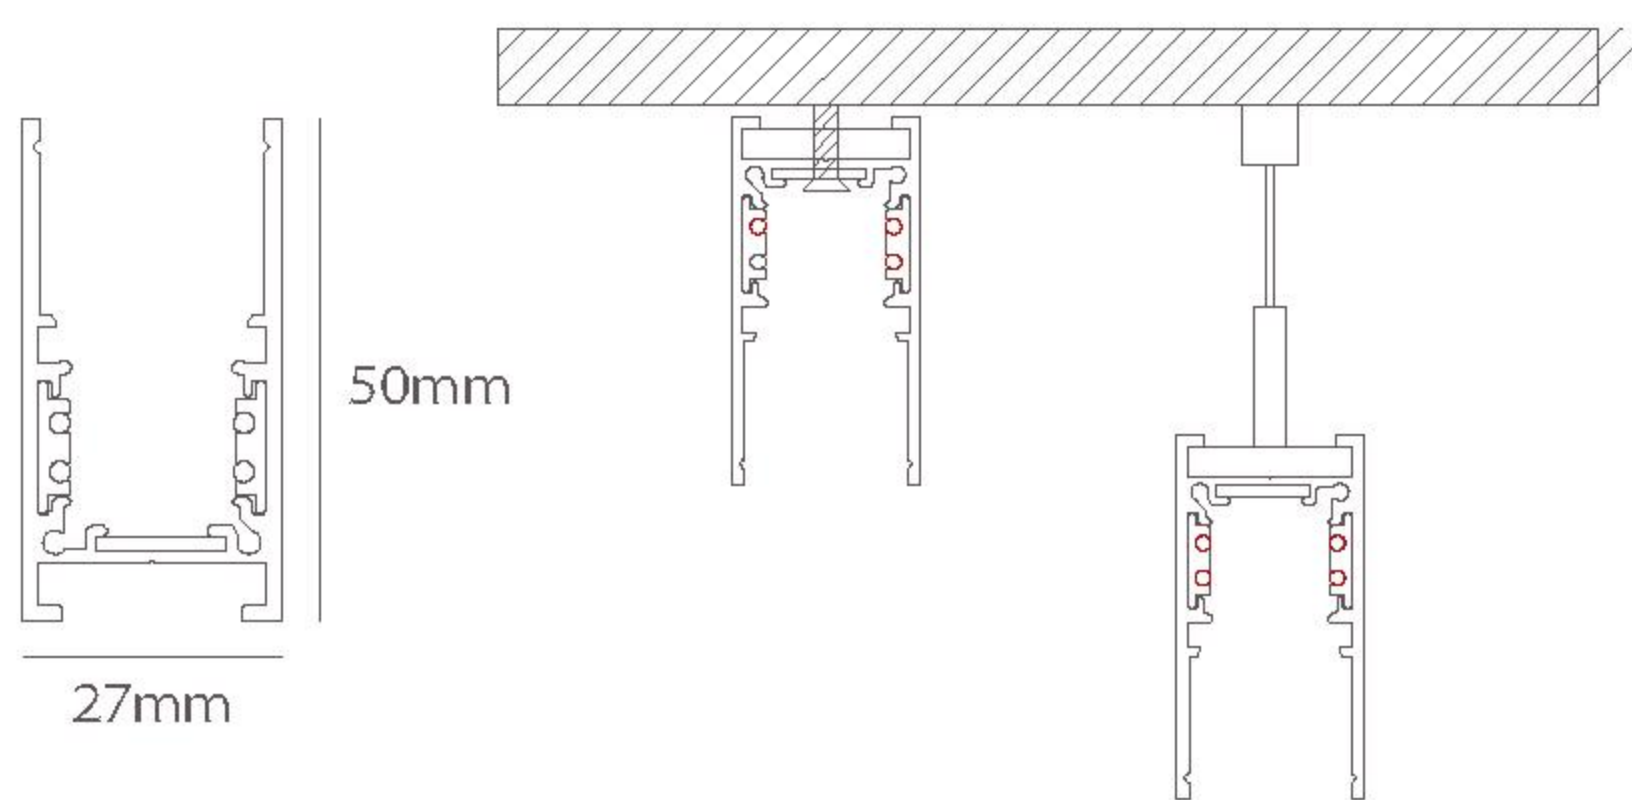

MAGNETIC FLOOD LIGHT



PRODUCTION OPTIONS

R20

Model: OML-XXASL-070040AC

Size : L112*W22.5*H45MM/ L112*W22.5*H45MM/L328*W22.5*H45MM
Power : 6x1W/12x1W/18x1W
CRI : ≥90
Beam angle : 24°

Model: OML-CXATL300-023045BR-BZK


Size : L300*W22.5*H45MM/ L600*W22.5*H45MM/L900*W22.5*H45MM/L1200*W22.5*H45MM
Power : 10W/18W/24W/36W
CRI : ≥90
Beam angle : 120°

R20/R16

Model: OML-CXATL114-023100CR-BZK

Size : L114*W22.5*H100MM/ L222*W22.5*H100MM/L330*W22.5*H100MM
Power : 6W/12W/18W
CRI : ≥90
Beam angle : 110°

MAGNETIC FLOOD LIGHT

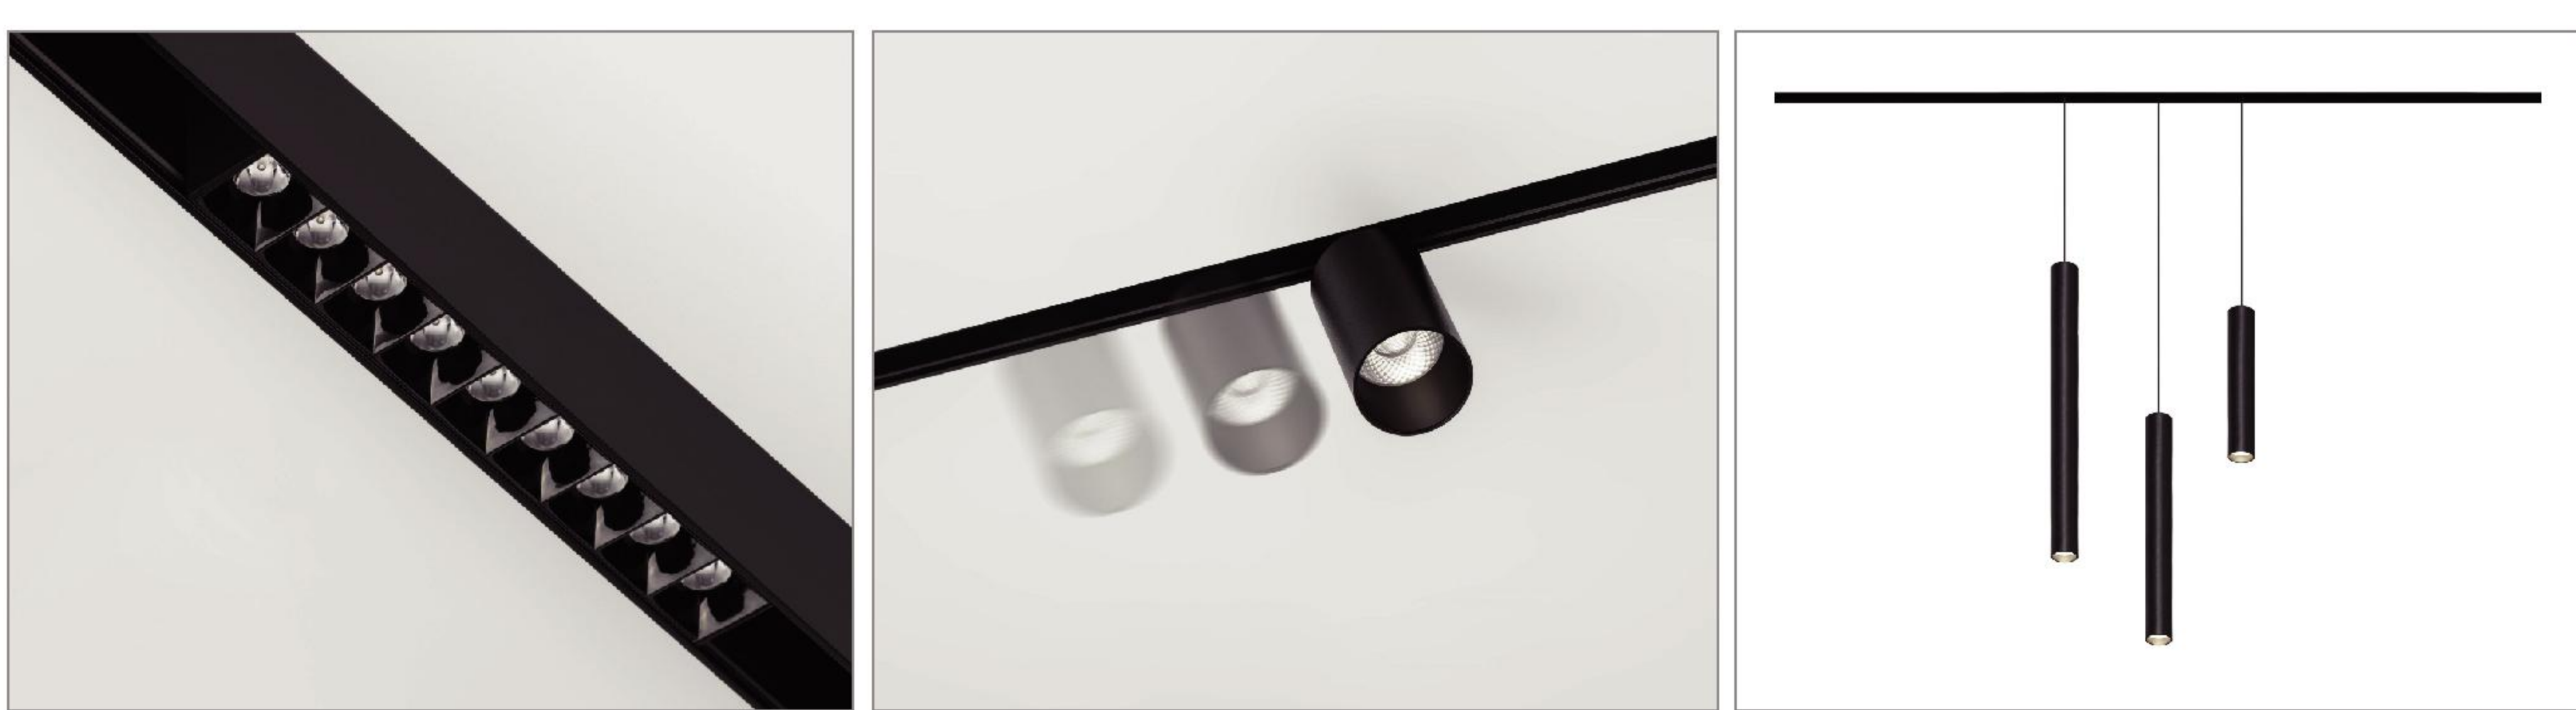

PRODUCTION OPTIONS

R20/R16

Model: OML-CXATL114-023100DR-BZK


Size : L114*W22.5*H100MM/ L222*W22.5*H100MM/L330*W22.5*H100MM
Power : 6W/12W/18W
CRI : ≥90
Beam angle : 24°

Model: OML-CDG45112

Size : ϕ 45*112MM/ ϕ 55*119MM/ ϕ 65*155MM
Power : 10W/20W/30W
CRI : ≥90
Beam angle : 15°24°36°

Model: OML-CDX30200

Size : ϕ 30*200MM
Power : 7W
CRI : ≥90
Beam angle : 24°

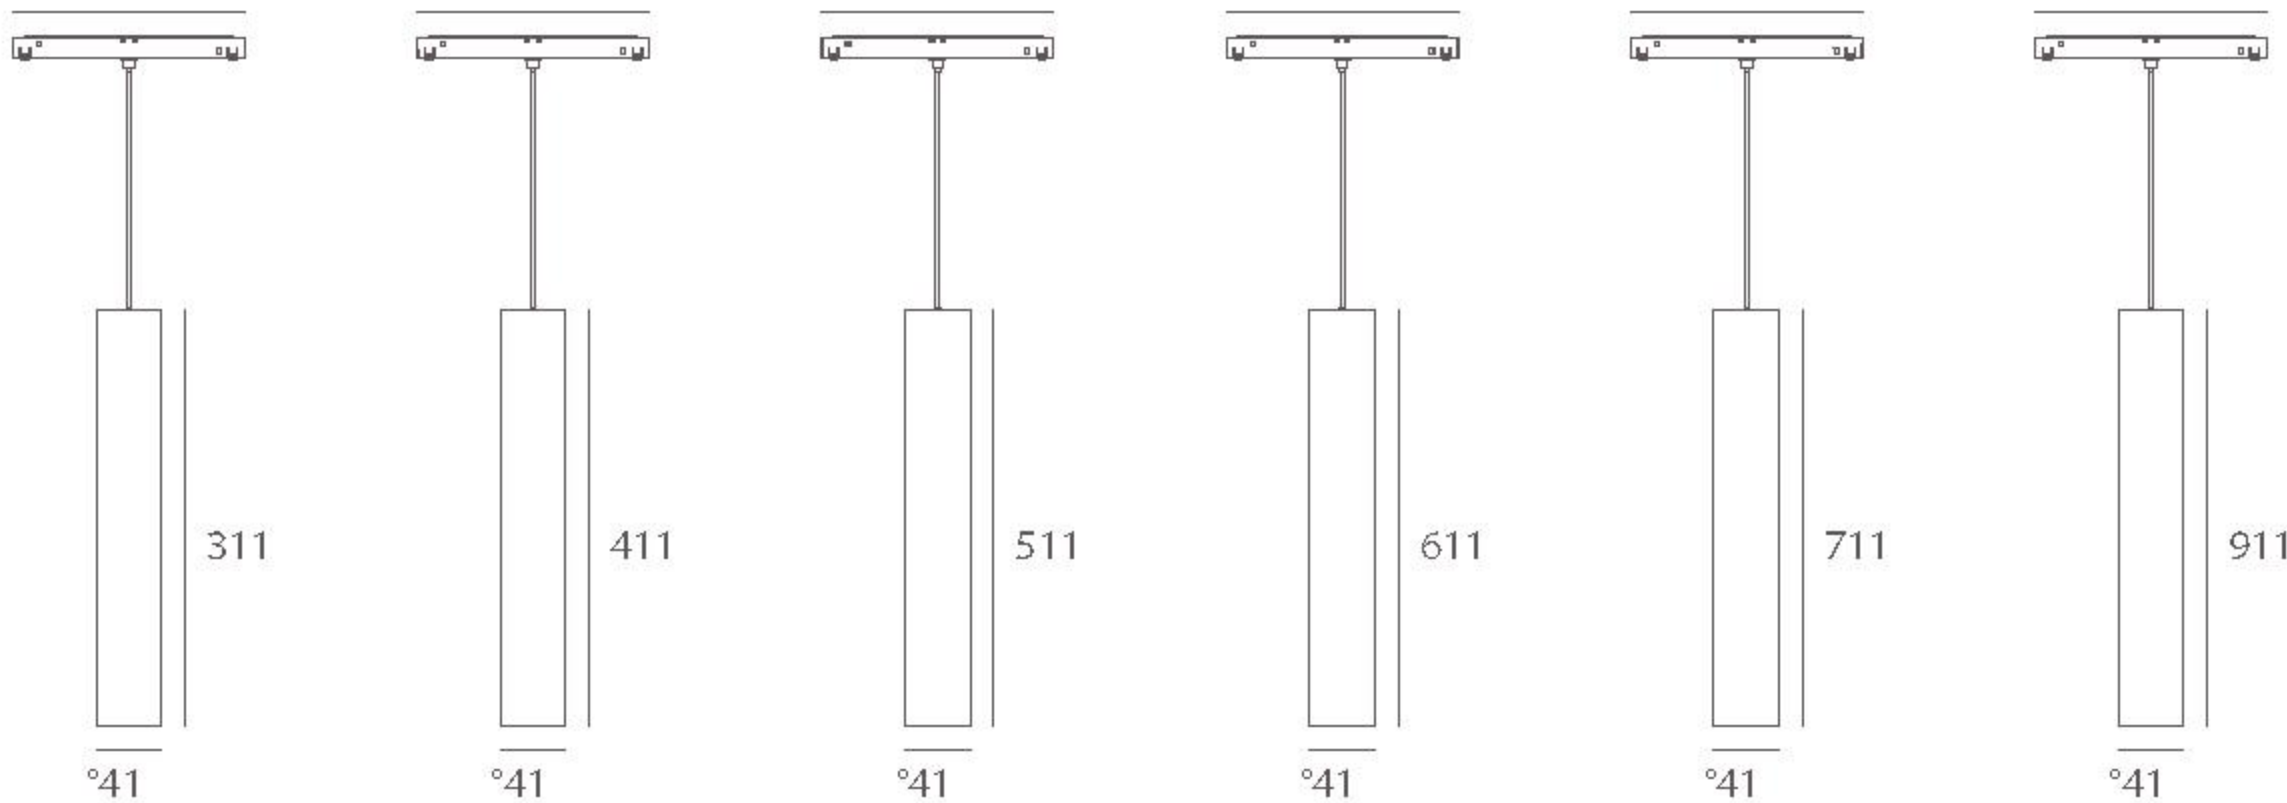

MAGNETIC ACCESSORIES

OML-DGTSC-100100AR

L Module

OML-DGTSC-100100BR

Outside L Module

OML-DGTSC-161095AR

U/Npvmf

OML-DGTSC-161161AR

+ Module

OML-DGTSC-PJJ

Splicing piece

OML-DGT-SRMK

Input module

OML-DGT-ZHMK

Pass through module

OML-DGT-ZJMK

Corner module

OML-DGT-TZJMK

T-corner formwork

OML-DGT-DX

2m pendant cord

OML-DGT-DG

End cap

OML-DGTEL-100100AR

L Module

OML-DGTEL-100100BR

Outside L Module

OML-DGTEL-161115AR

U/Npvmf

OML-DGTEL-161161AR

+ Module

OML-DGTEL-PJJ

Splicing piece

OML-DGTEL-100W

100W
DC48V integrated power supply

OML-DGTEL-150W

150W
DC48V integrated power supply

OML-DGTEL-200W

200W
DC48V integrated power supply

INSTALLATION

Pendant Version

1 Fix the installation position of the track, drill holes according to the hole size of the track and install expansion screws (if it is wood or other suspended ceiling, directly drill self tapping screws)

2 Fix the rail hanging board with the screws on the accessory package

3 Align the hanging board with the rail hanging board slot and insert it

4 Install the rail plug

5 Connect the power supply (refer to the wiring diagram for connection mode), ensure the power supply is unblocked, install the lamp, turn on the switch and turn on the light(If the power supply is built-in, it is directly connected to the 220 V mains power supply.)

Power box(built-in)

Power box(External)

No baffle

1 Confirm the installation position of the track and reserve the installation space according to the opening size of the track.

2 Make ceiling finish, finish with latex paint / wall - paper / others, remove installation positioning cover / construction protection cover, install lamps and close the door after finishing the flower finish turn on the switch and light up.

3 After finishing the decoration, remove the installation positioning cover / construction protection cover, install the lamps, close the switch and turn on the light.

08

Embedded Light Collection

OFFICE LIGHTING SERIES
CATALOGUE 2024

25/26


HANGING LINEAR LIGHT

POLLY SERIES




PRODUCTION OPTIONS

Size: $\Phi 60 \times 80 \text{mm}$
Cutout: $\Phi 55 \text{mm}$
Power: 9-10W
Beam angle: $15^\circ/24^\circ/36^\circ$

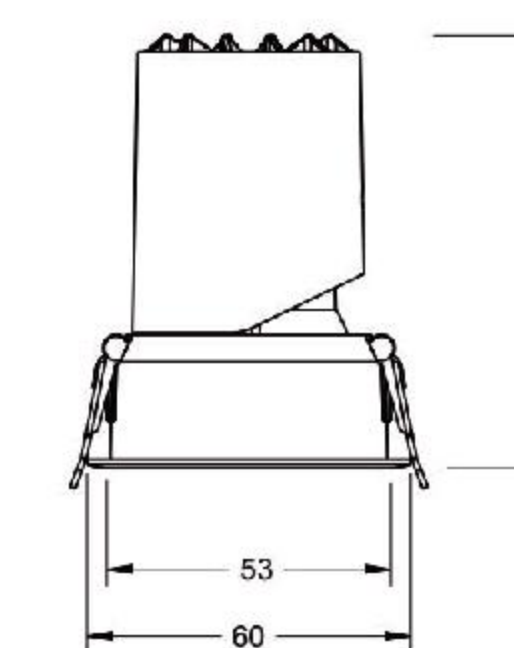

PRODUCTION OPTIONS

Size: $\Phi 84 \times 85 \text{mm}$
Cutout: $\Phi 75 \text{mm}$
Power: 13W
Beam angle: $15^\circ/24^\circ/36^\circ$

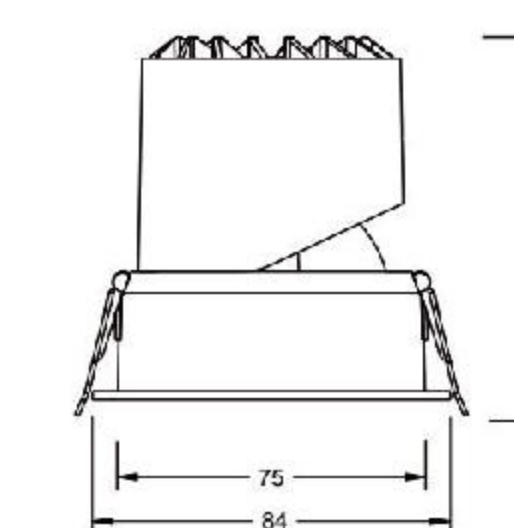


HANGING LINEAR LIGHT

BEAUTIFY




BEAUTY LIGHT IN FRONT OF THE MIRROR

Beauty light = contour light + soft supplement light
Professional studio lighting method to effectively eliminate local filling and restore the real face

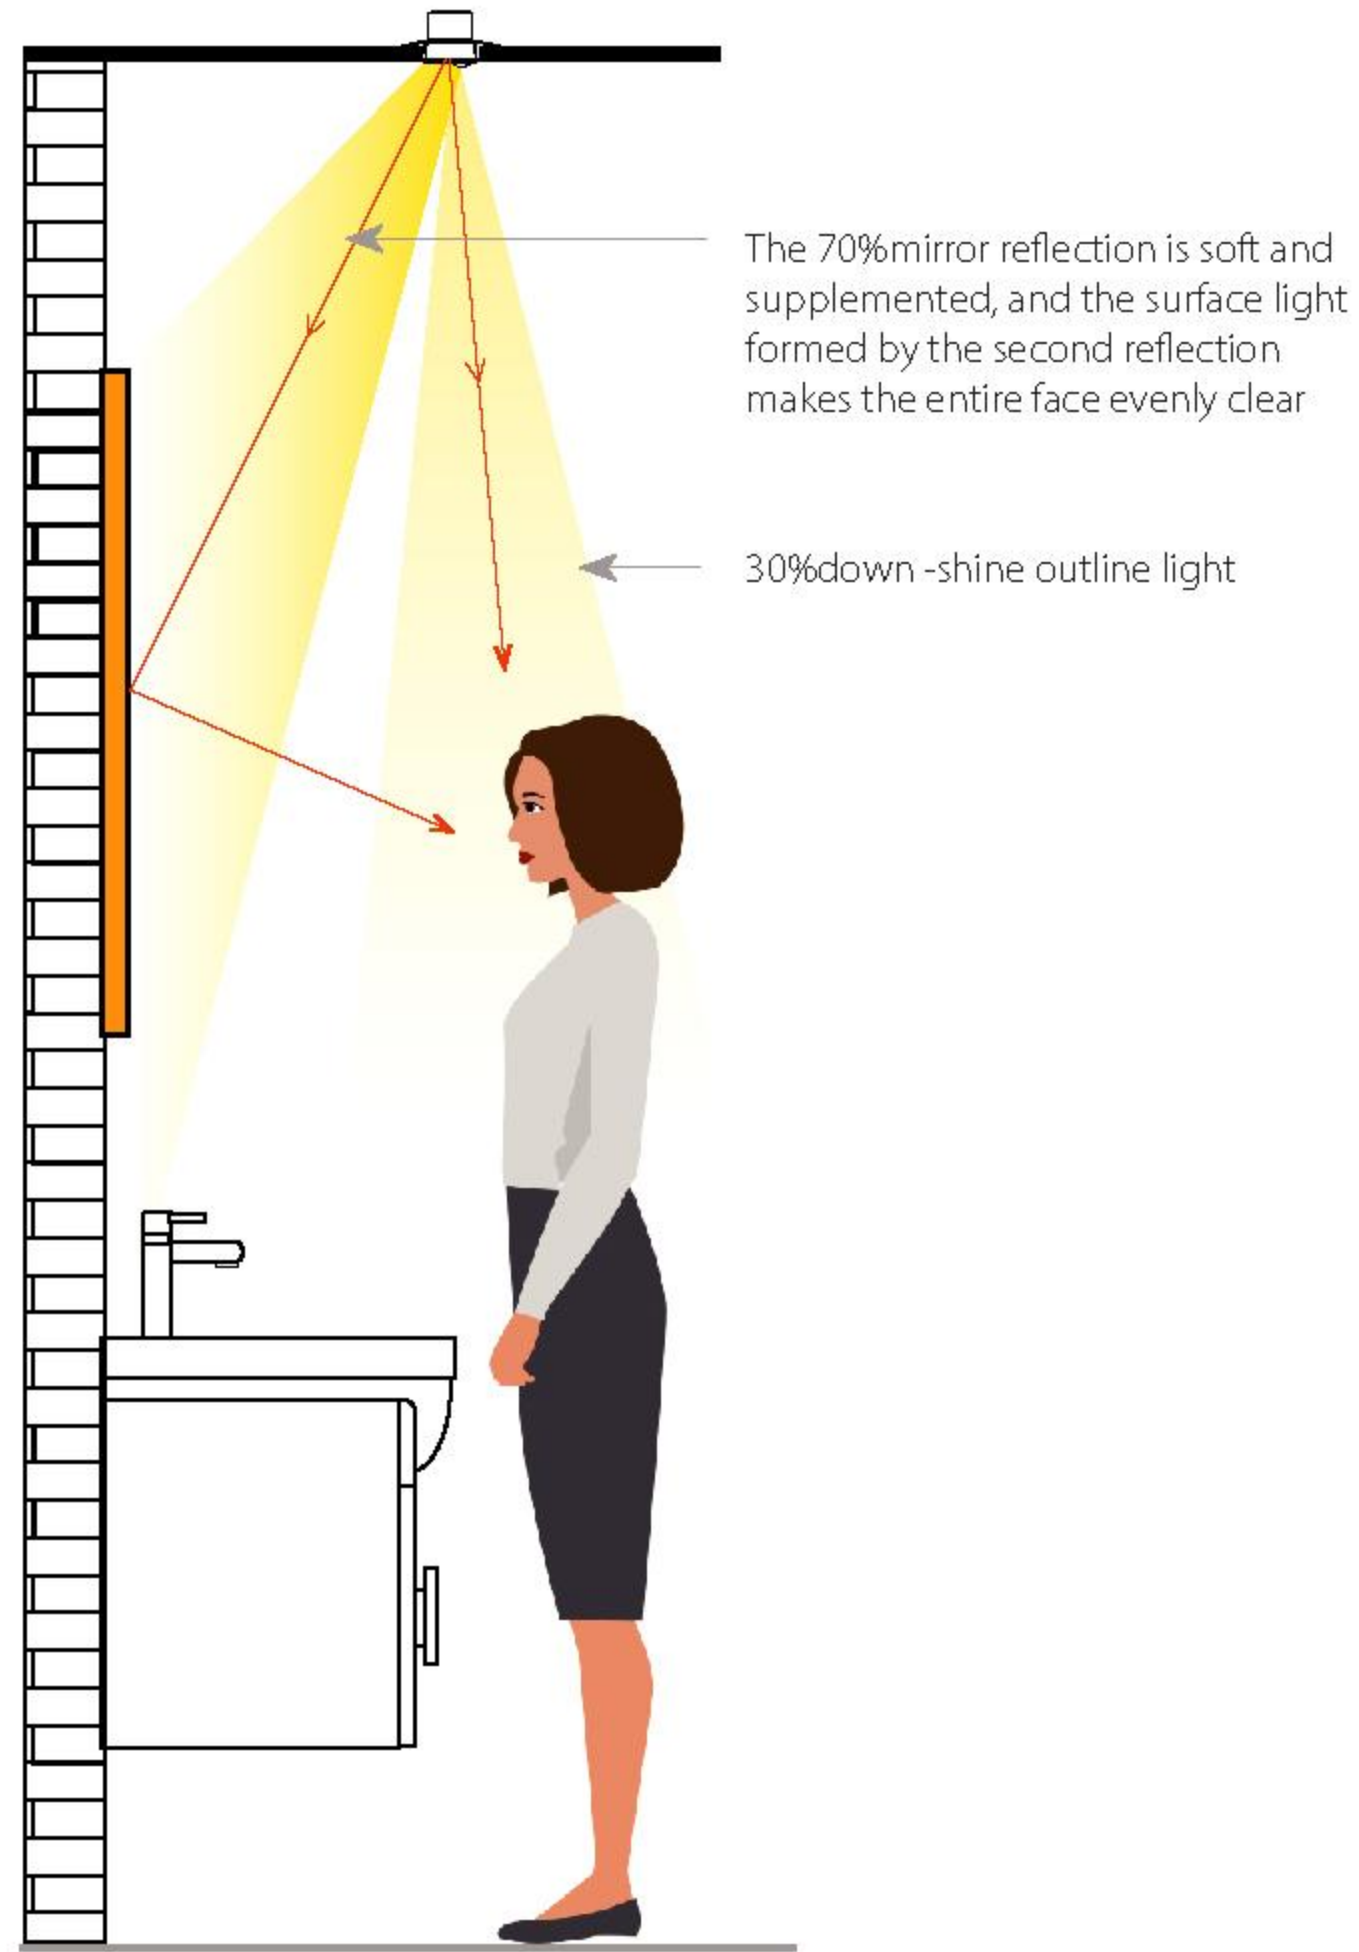

After launching the mirror, it effectively eliminates the shadow of the face and softens the face

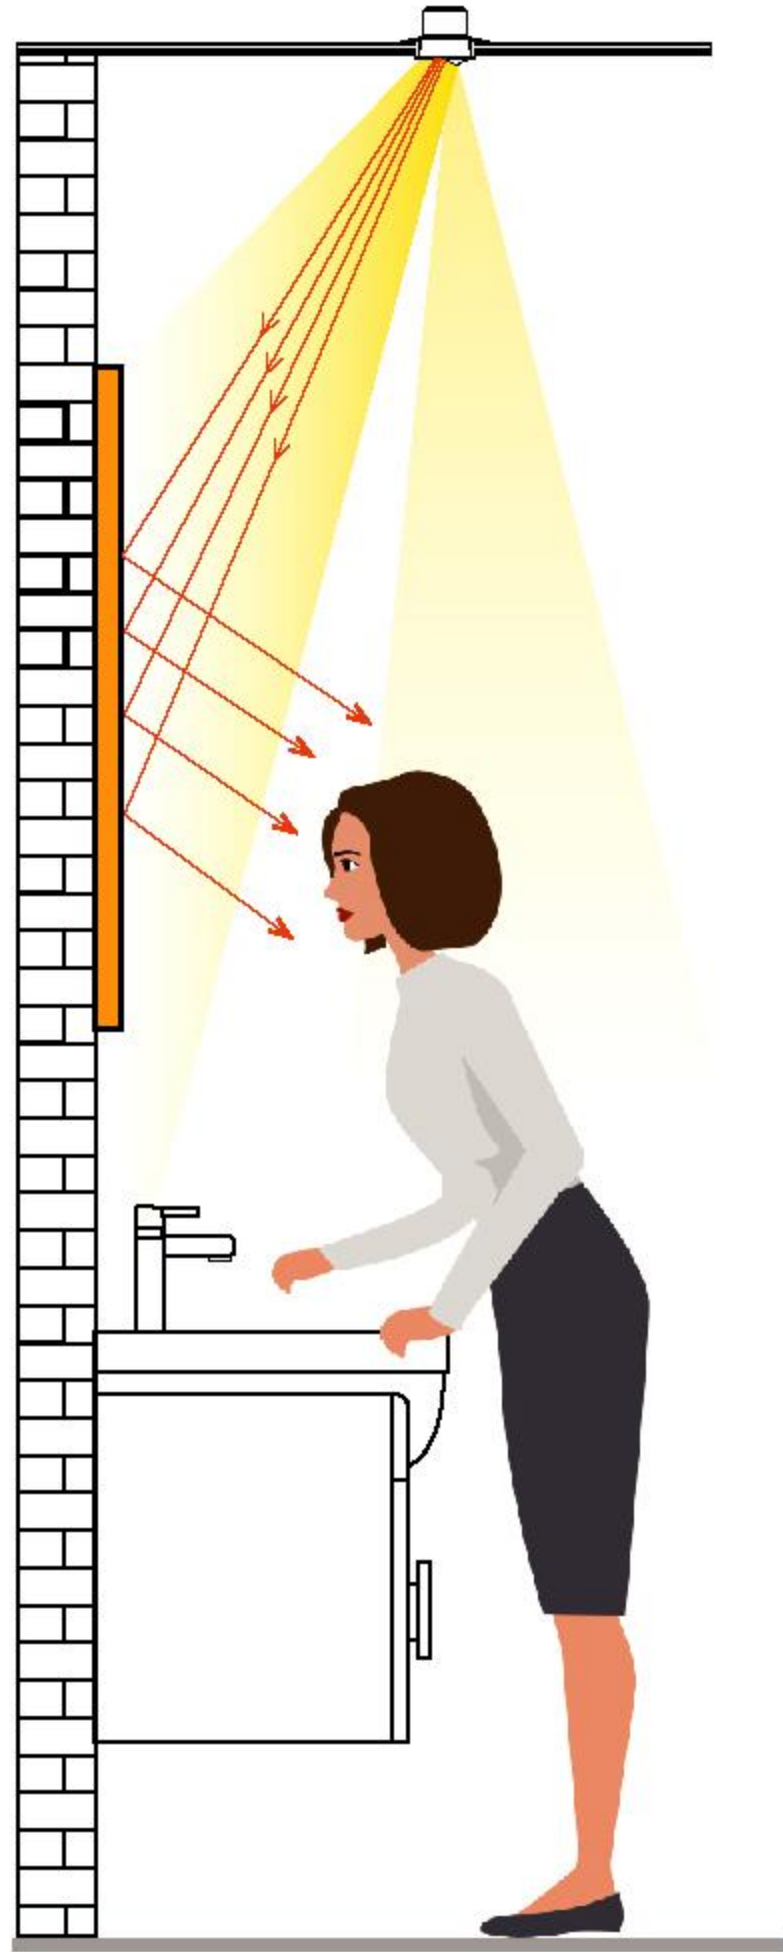


Patented optical design
The closer to the mirror, the brighter the face of the face

PRODUCTION OPTIONS


Model: BT-1011E75

Type : Recessed
Cutout : $\Phi 75\text{mm}$
Size : $\Phi 83 \times 80\text{mm}$
CCT : 2700K~6500K
Beam declination : $30^\circ / 15^\circ$
IP Protection Class : IP44
Voltage : AC220-240V 50/60Hz
Power : 12W

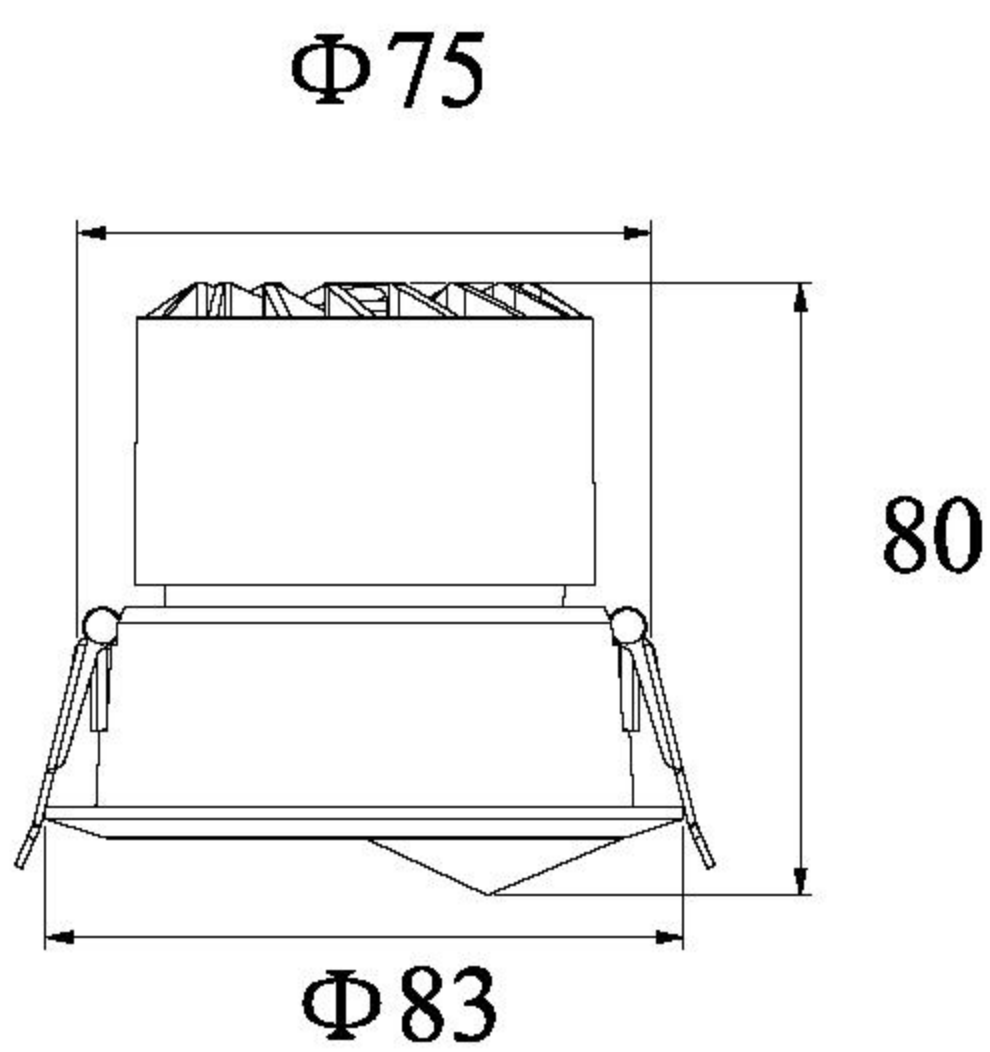



EXPERIMENTAL DATA

CRI test Ra 98
IES test Rf 98, Rg 102

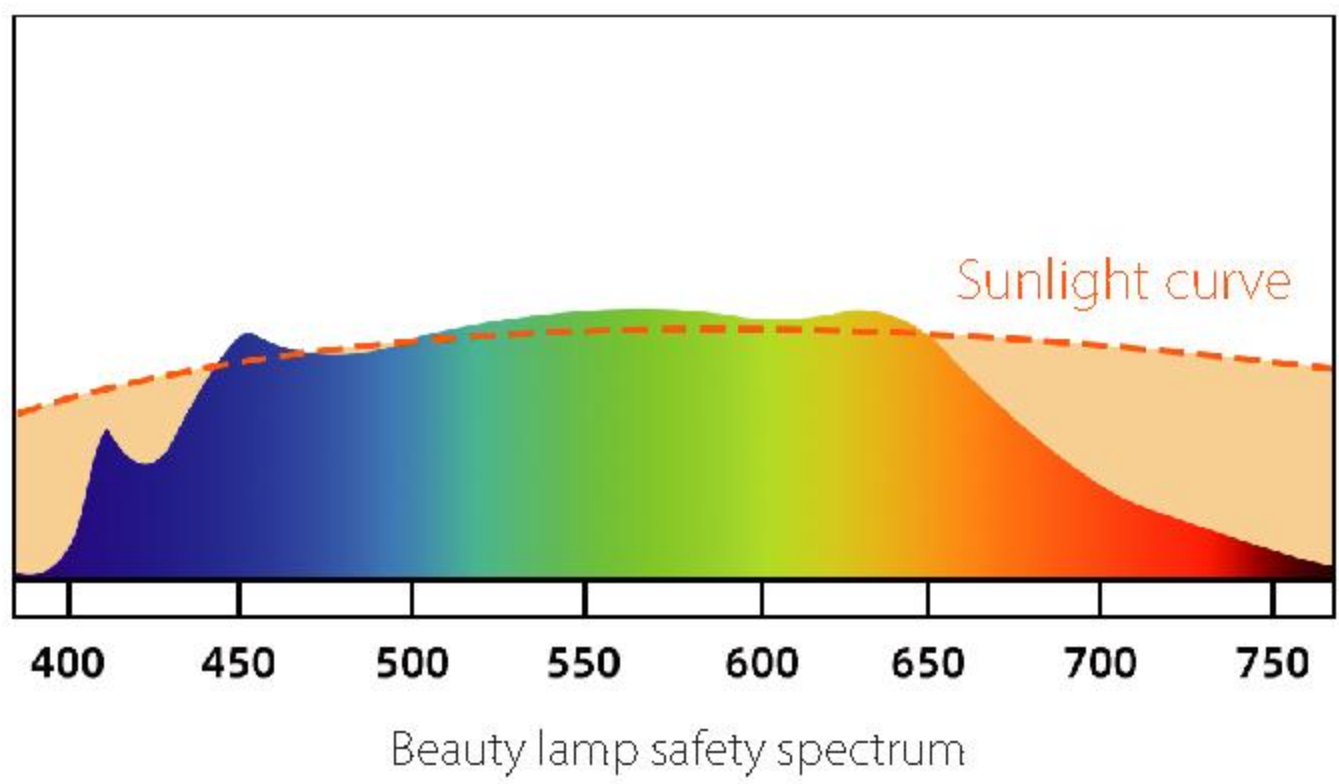


Maintain high level of brightness and minimum decline
According to the Lux-Distance curve, the 3-meter height is more than 120lux, which is an excellent mirror choice for hotels, shopping malls, and furniture.

Eff: 77.69 lm/W
lm : 997.422
cd : 1461

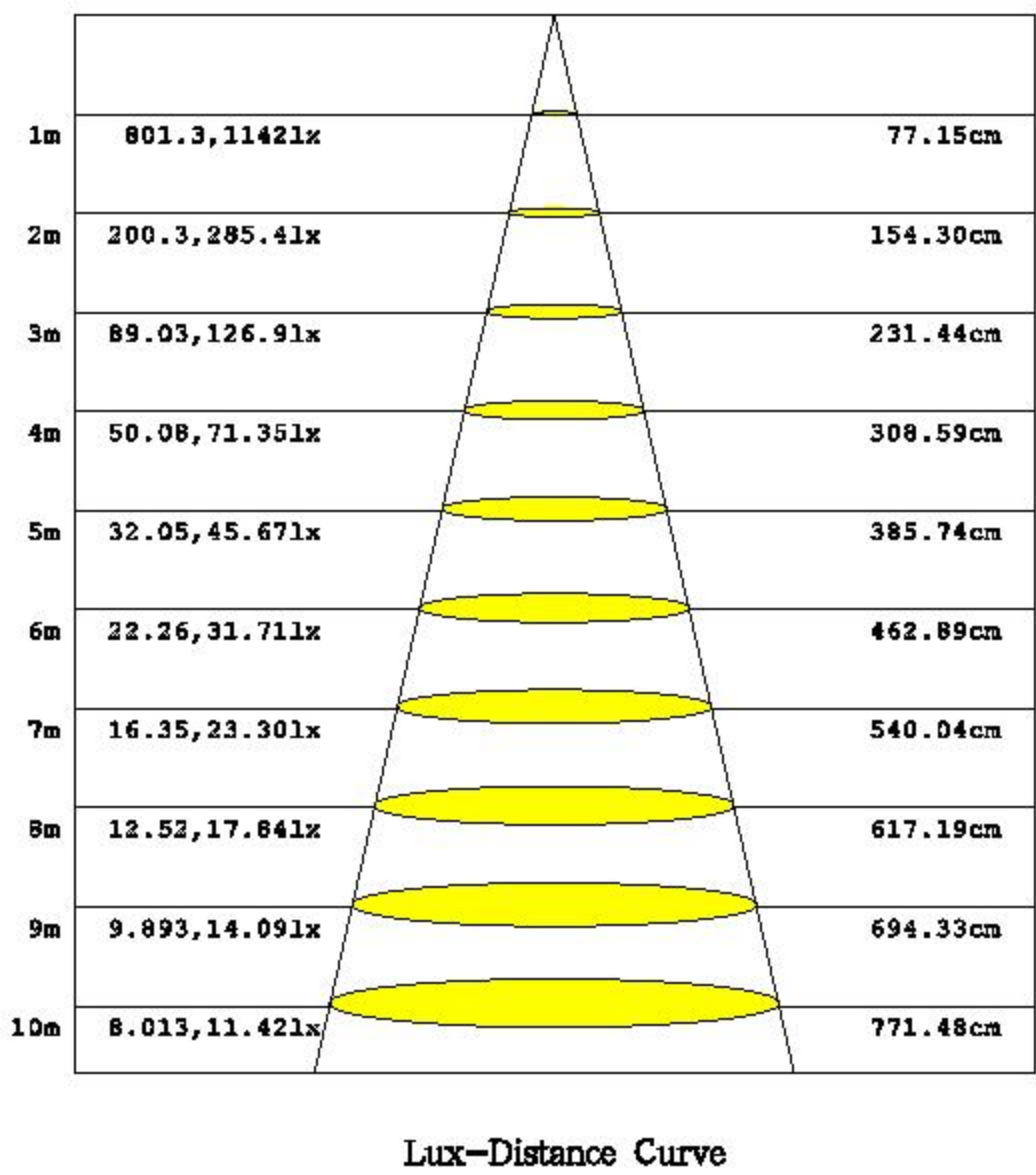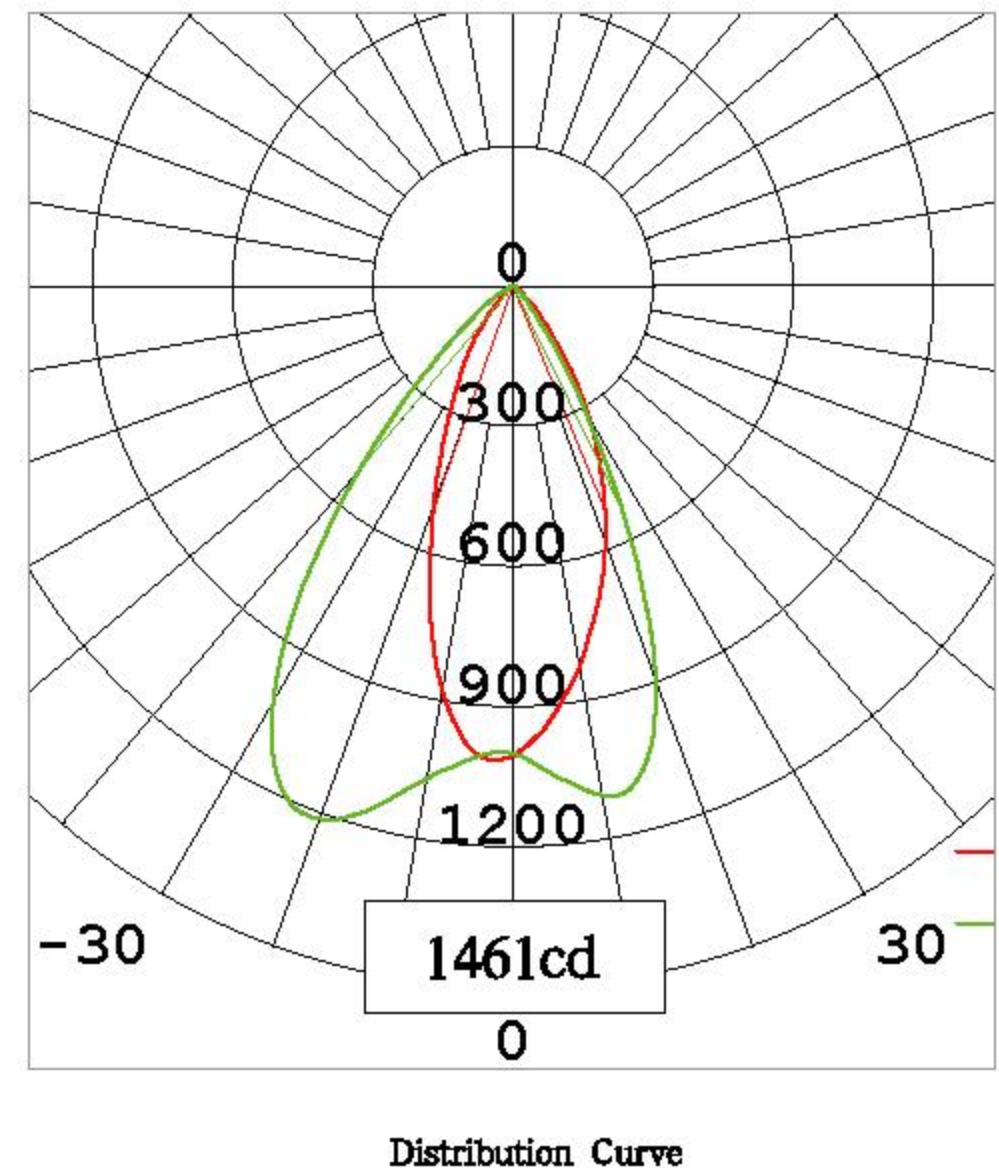




HANGING LINEAR LIGHT

DUAL LED SOURCE PRODUCT CATALOGUE

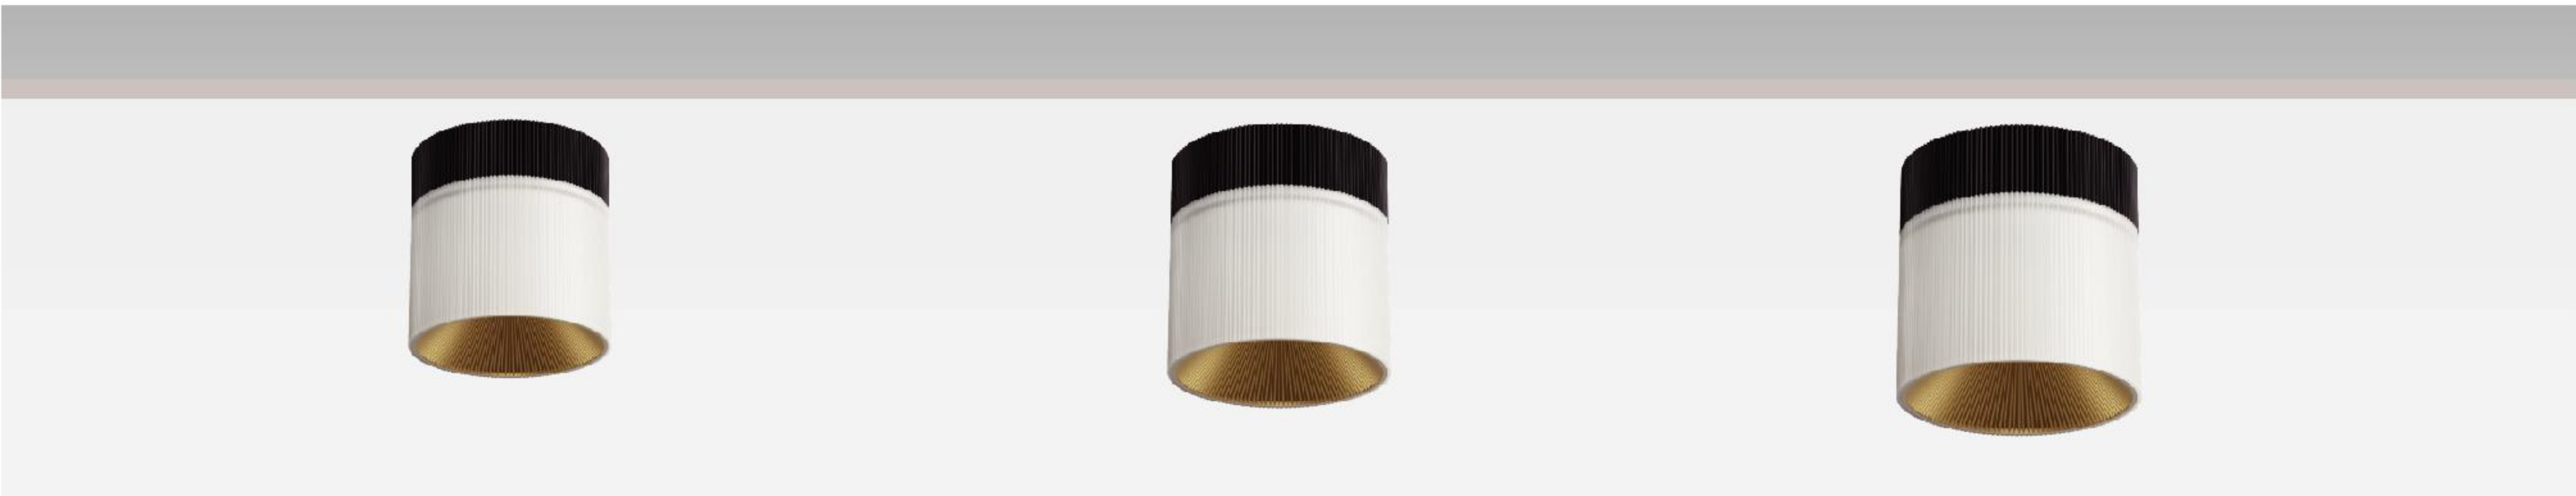


PRODUCTION OPTIONS

Type :	Recessed
Cutout :	Φ 75mm
Size :	Φ 83x80mm
CCT :	2700K~6500K
Beam declination :	30° / 15°
IP Protection Class :	IP44
Voltage :	AC220-240V 50/60Hz
Power :	12W

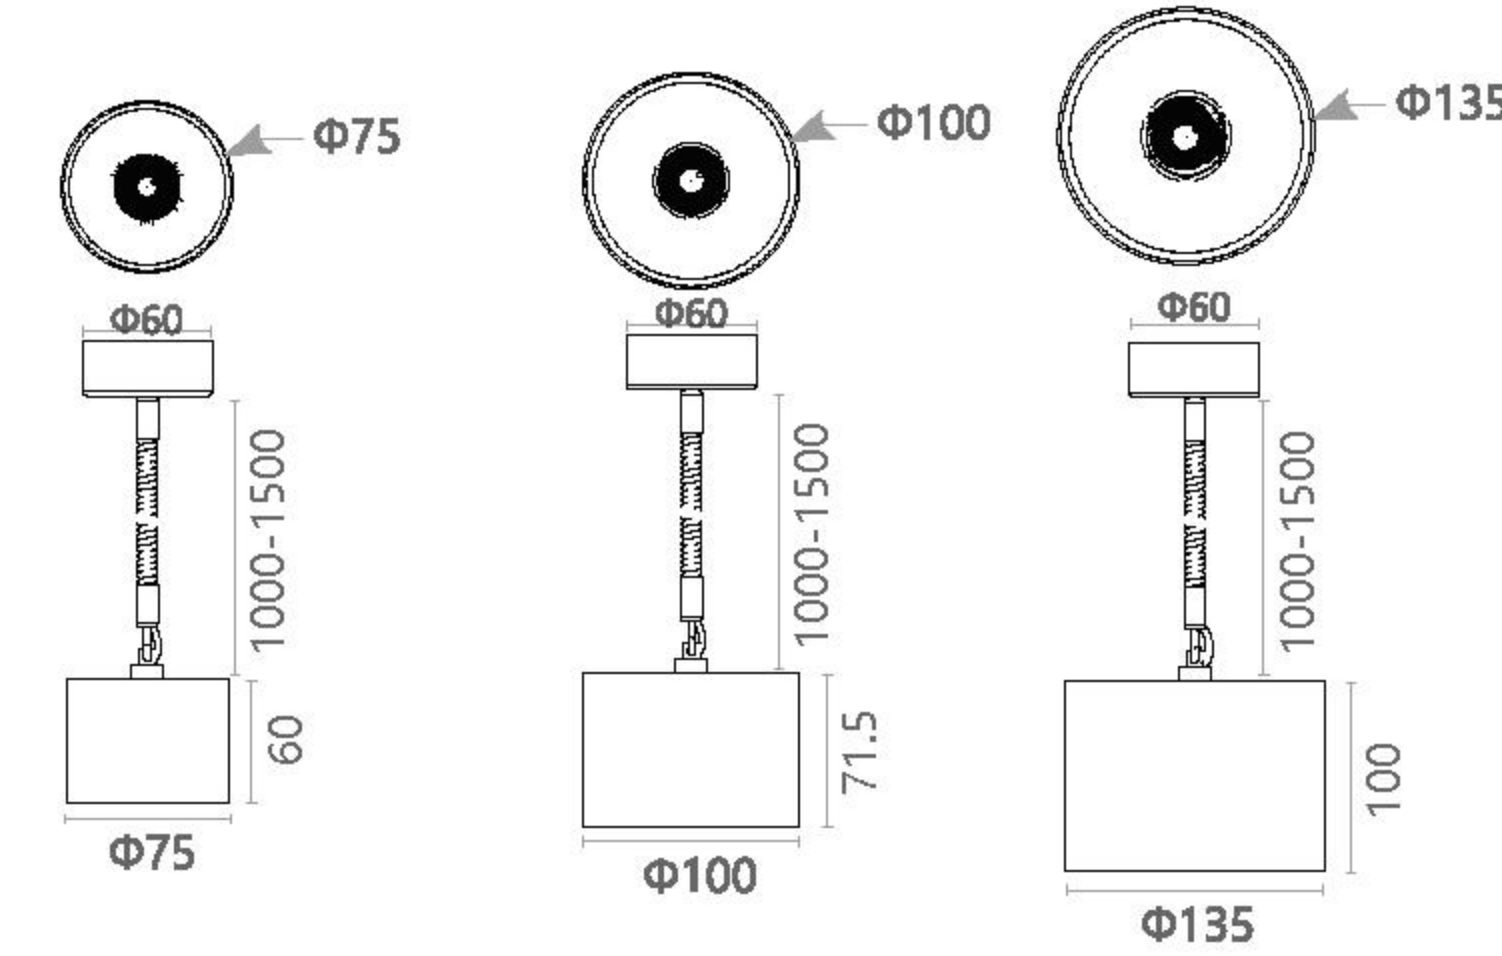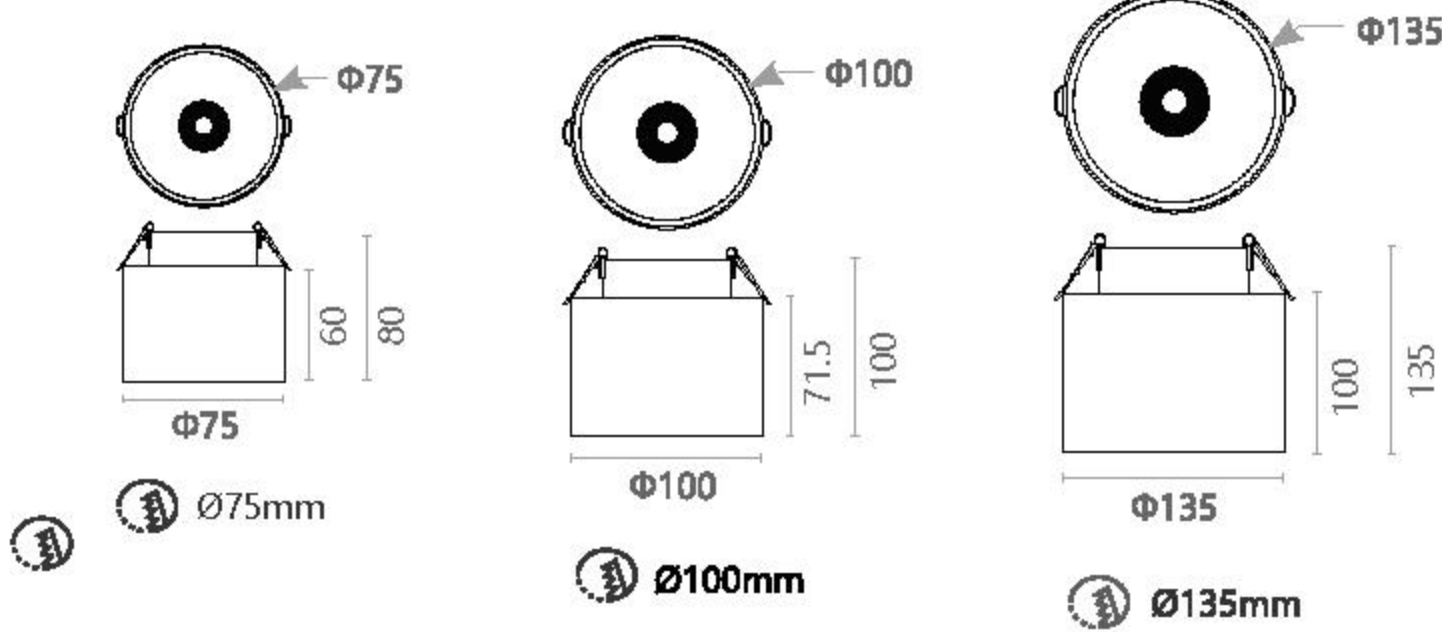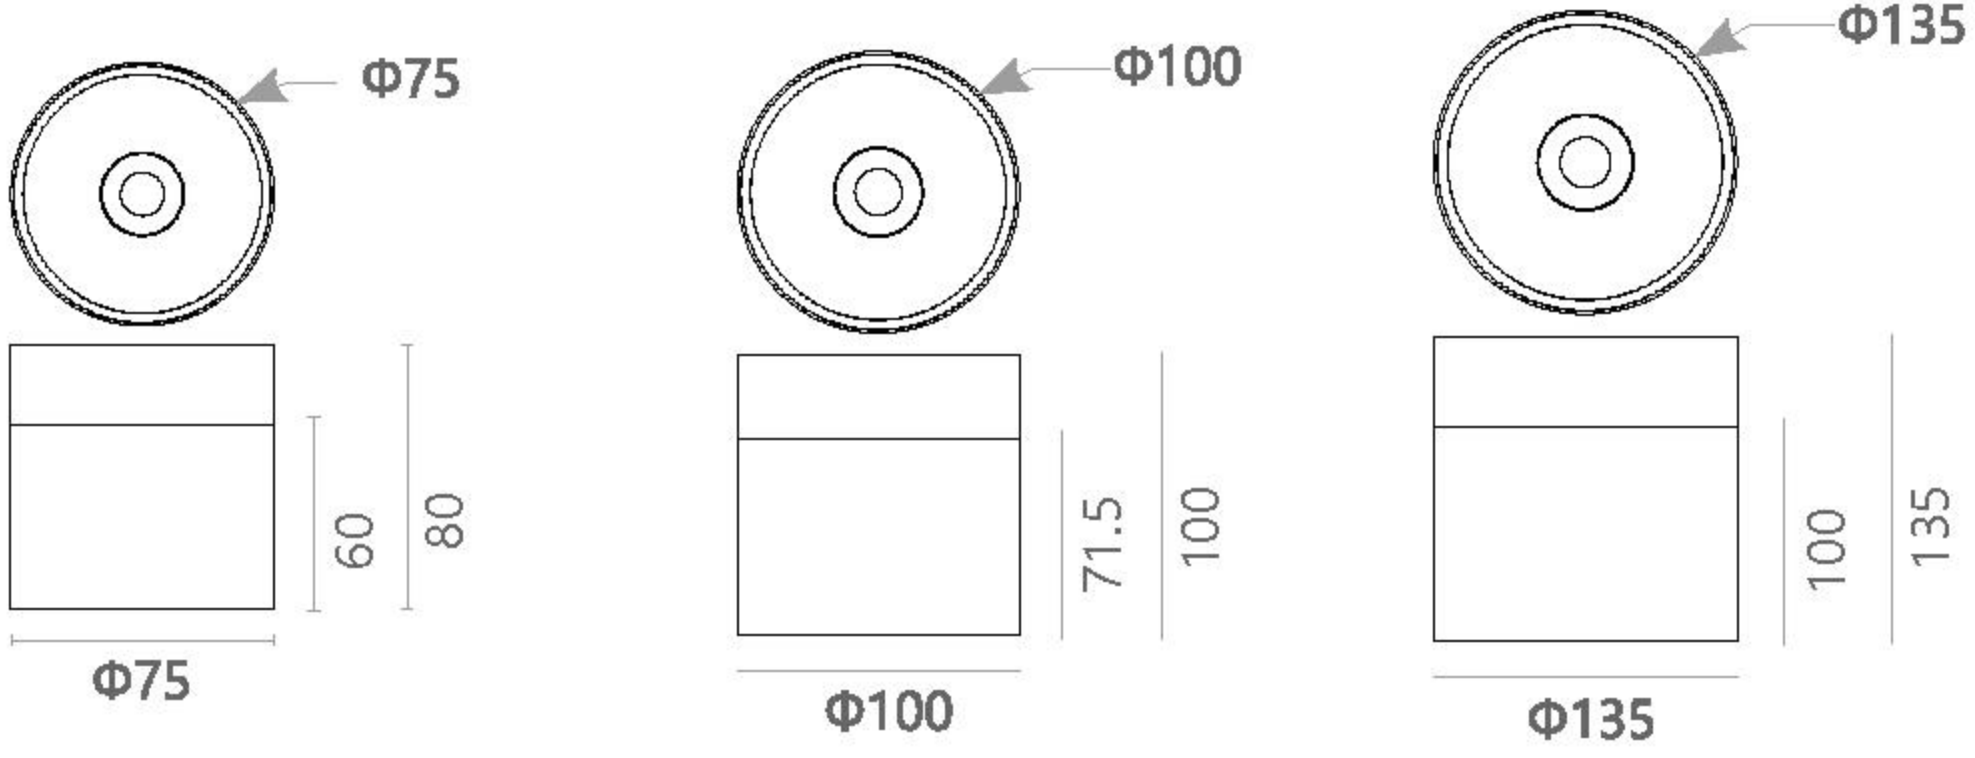

DUAL LED SOURCE

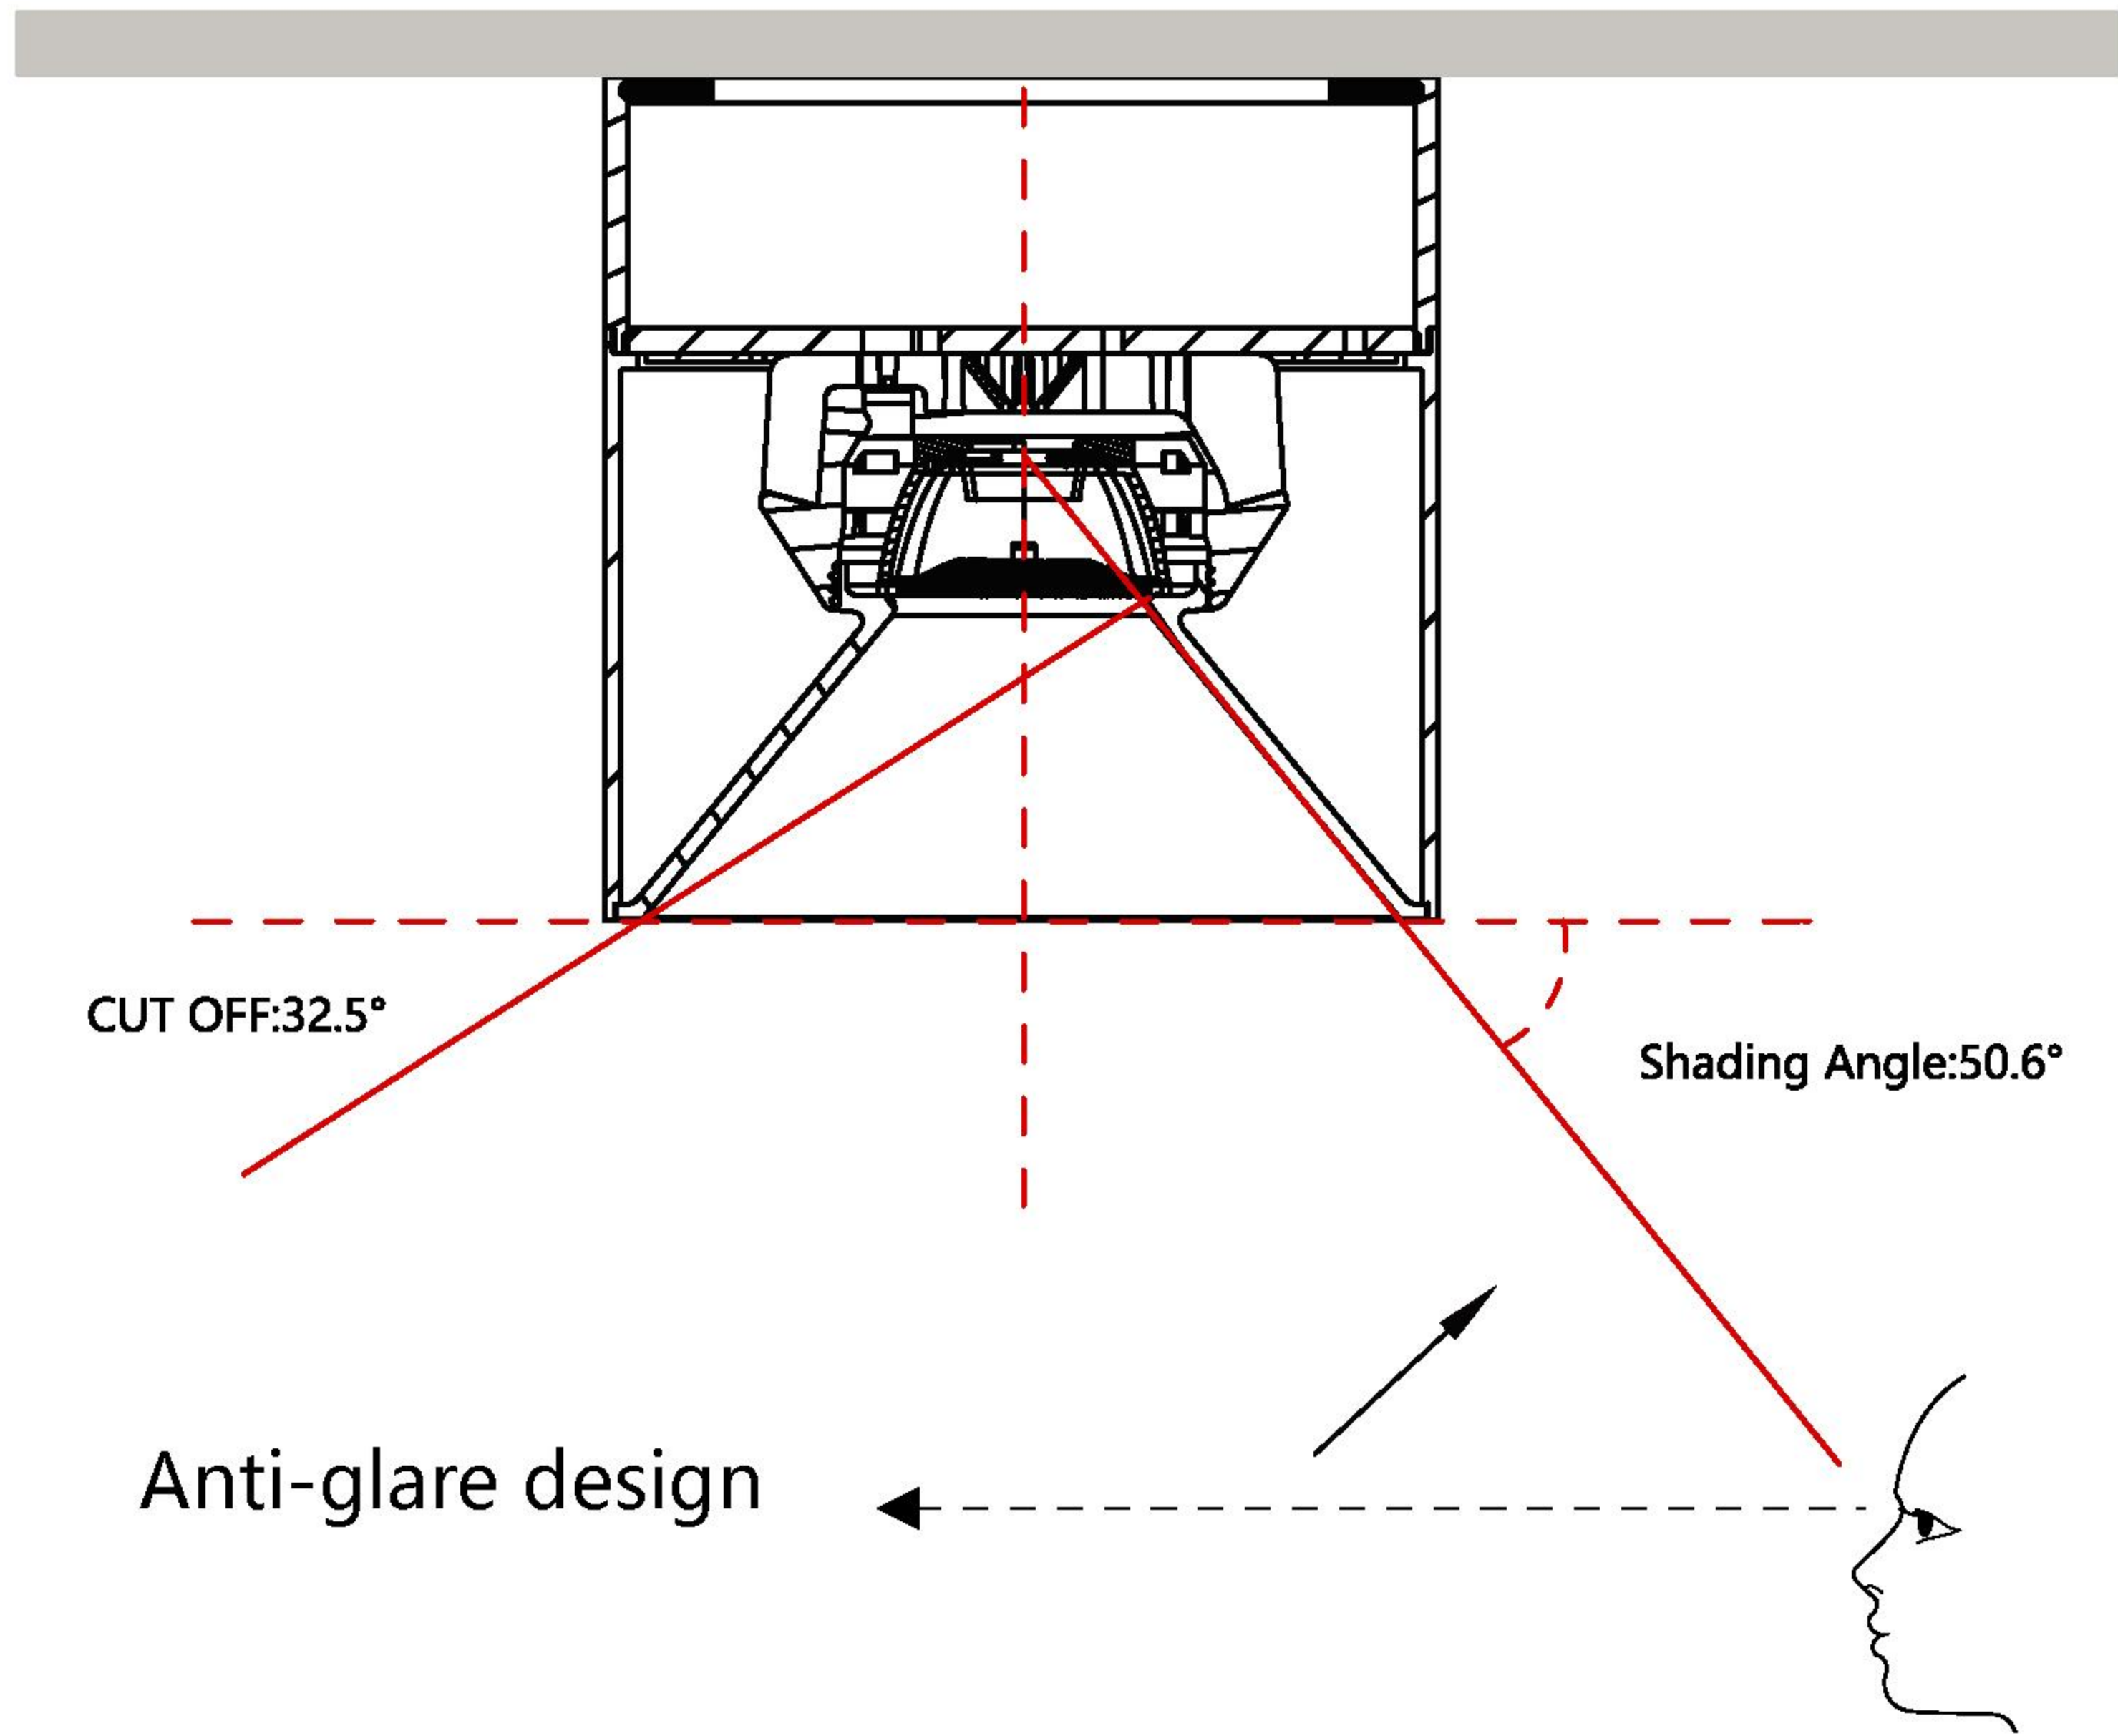


- 1. Surface, recessed, pendant optional, magnetic, track can be customized;
- 2. Different beam angle different power, different trim available for various directional lighting application;
- 3. 32.5° cut-off angle design create a comfortable space ideal for high-end indoor space.

[Size Lineup] Φ135 Φ100 Φ75

[Beam Angle] 24° 36° 45°

[CCT] 2700K~6500K

LIGHT BEAM

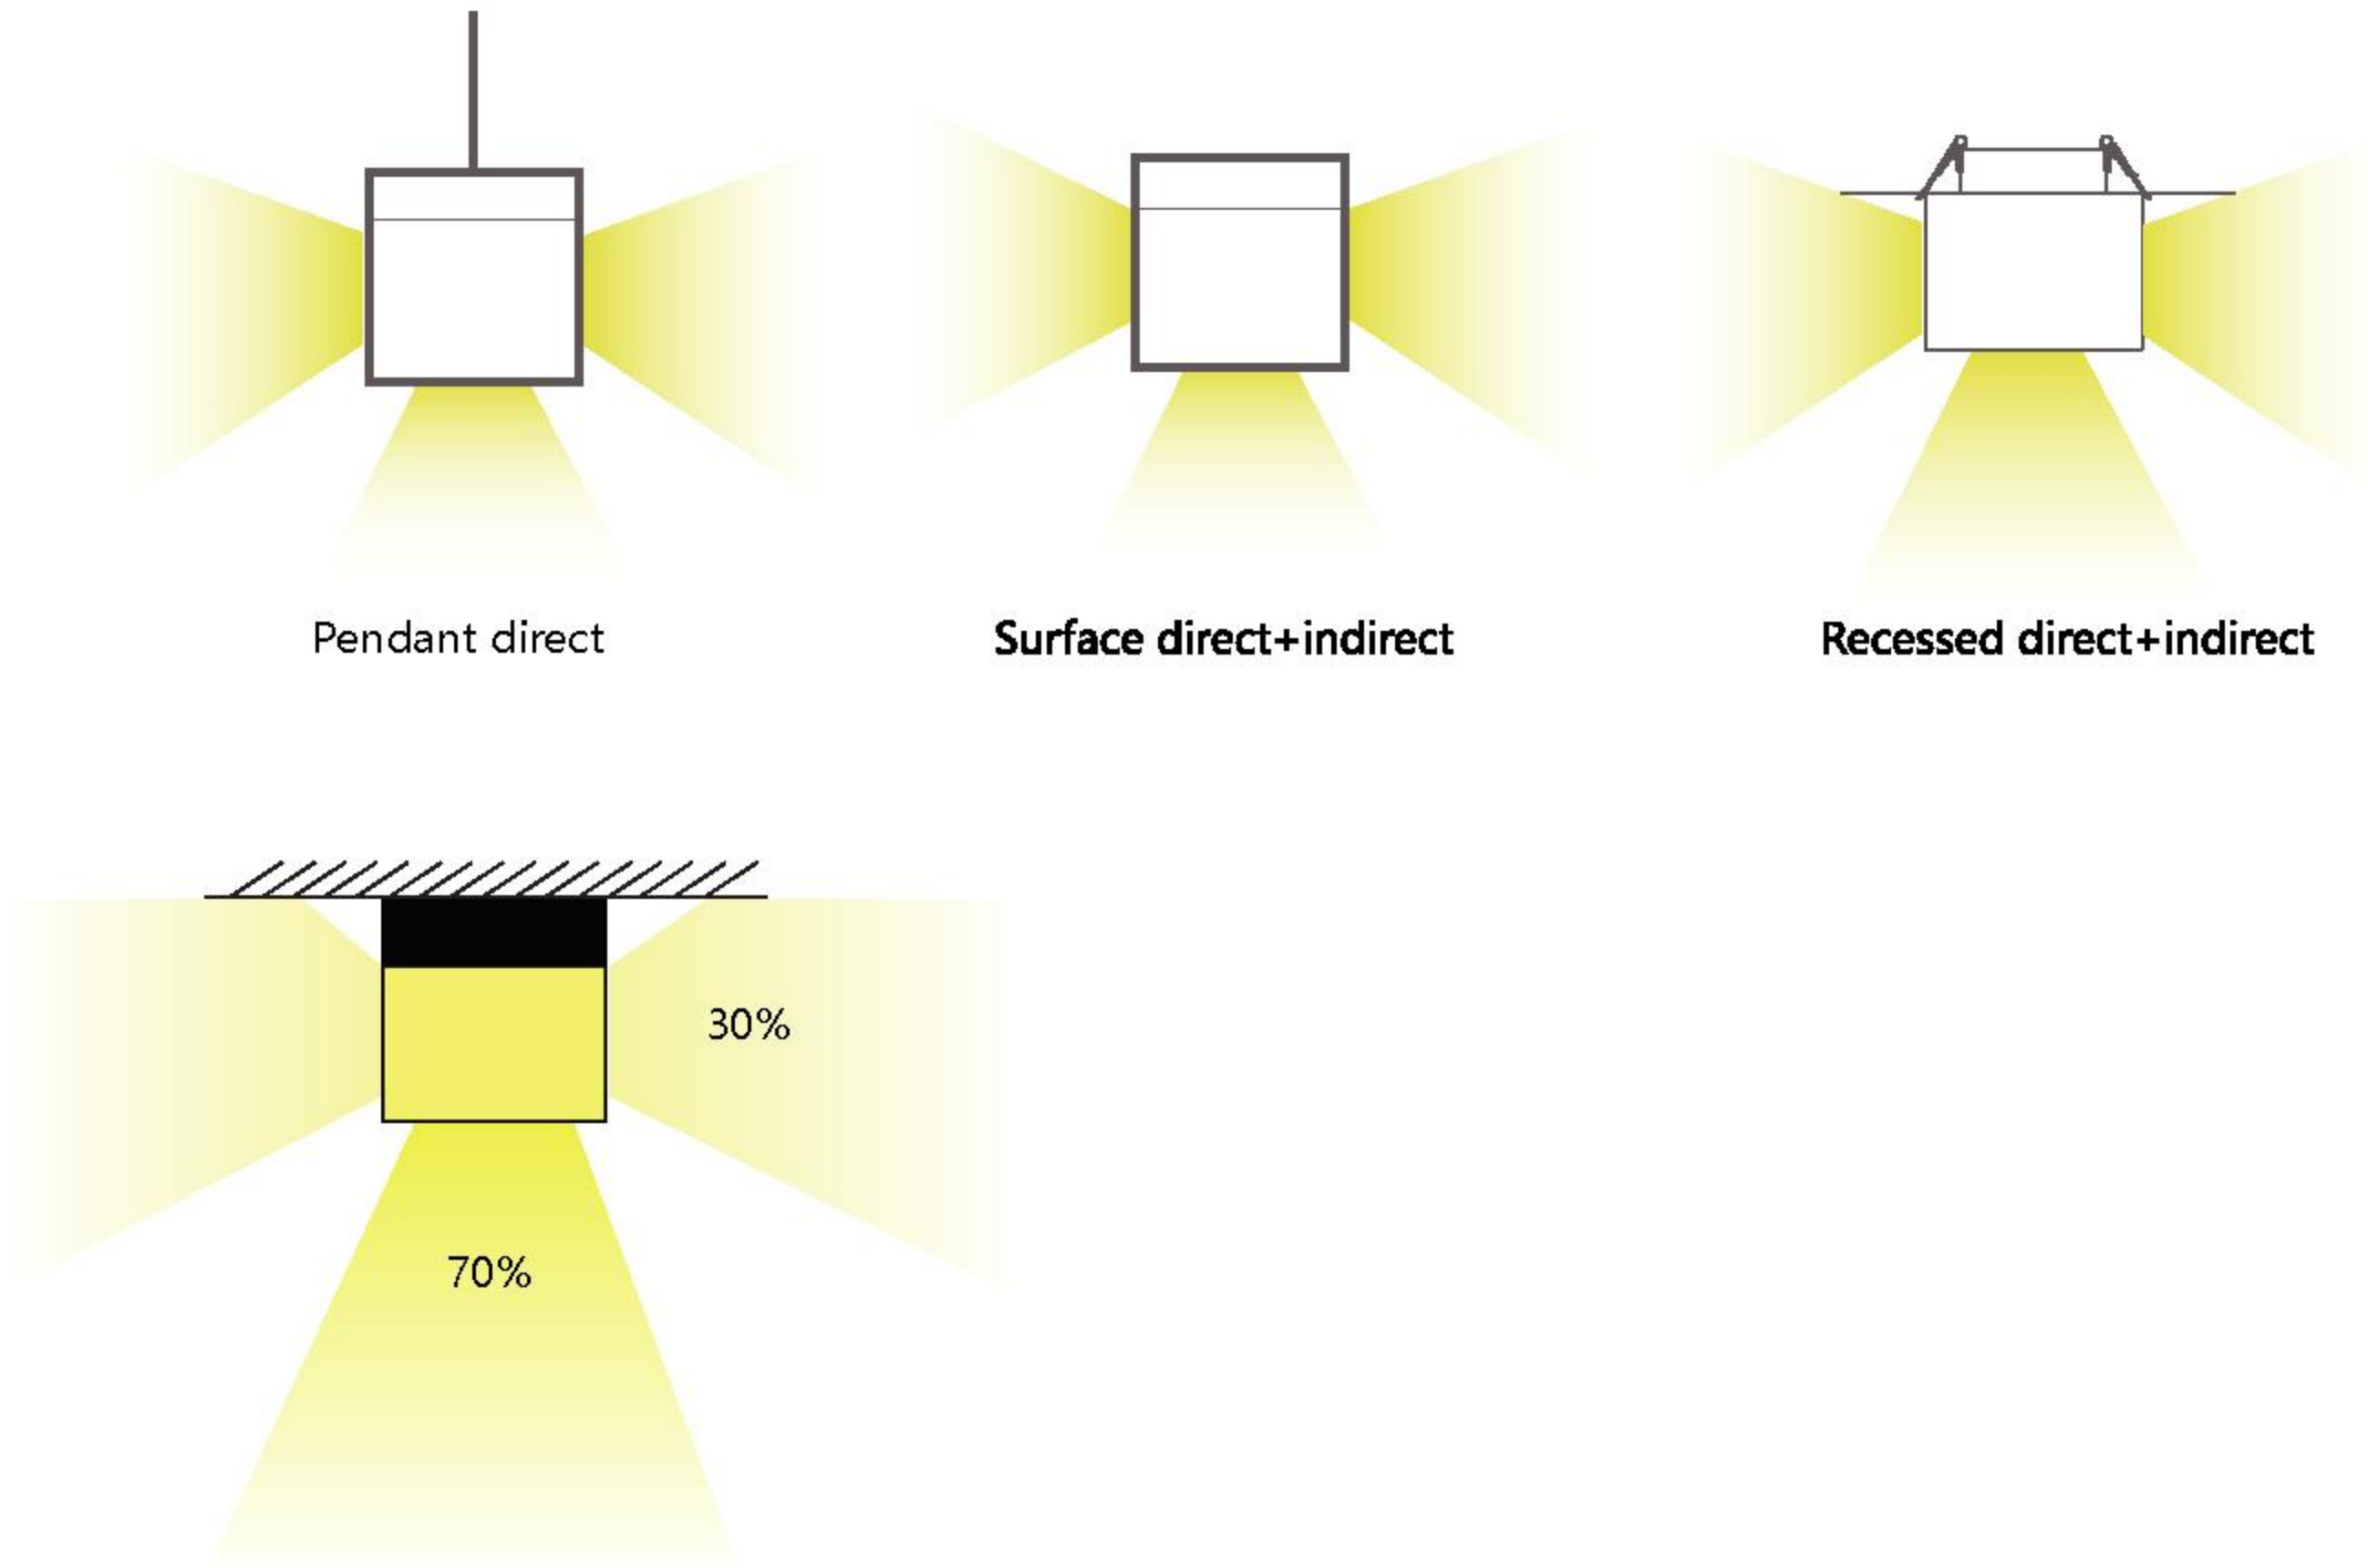

The surface lamps provide 70% direct light with completely glare-free illumination. Additionally, a uniform 30% indirect light is achieved through a rational grain design, allowing for separate switching and dimming.


09

Track light


TRACK LIGHT




IC-083-AP1010
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.80mm
Thickness of Alu: 0.70mm

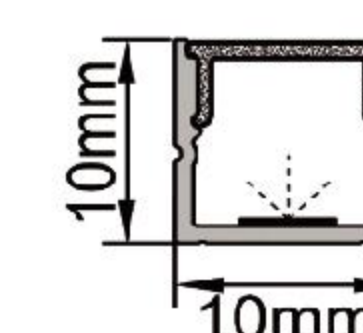


IC-083W-AP1010
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.80mm
Thickness of Alu: 0.70mm

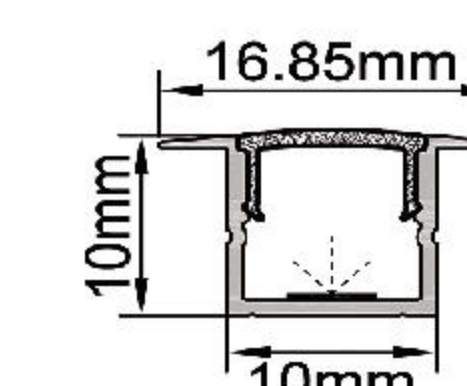


IC-055-AP1307
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.80mm
Thickness of Alu: 1.25mm

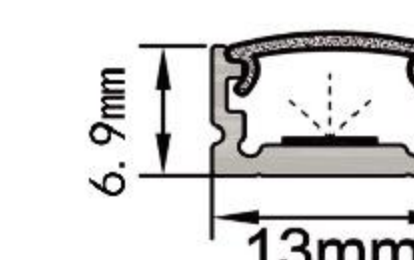


IC-077-AP1307
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.80mm
Thickness of Alu: 0.70mm

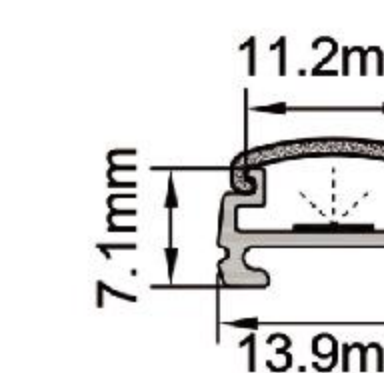


IC-070-AP1707
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.85mm
Thickness of Alu: 0.70mm

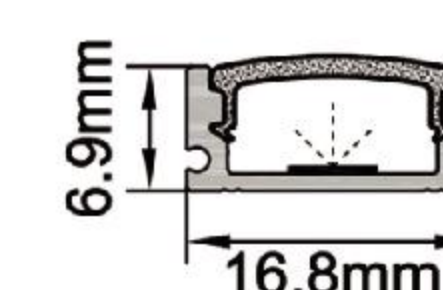


IC-070W-AP1707
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.85mm
Thickness of Alu: 0.70mm

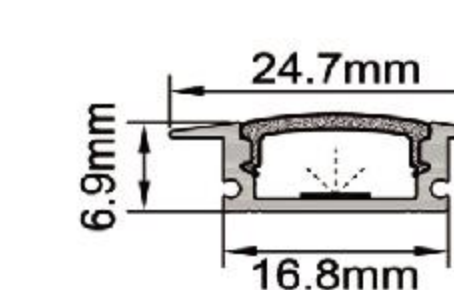


IC-061-AP1714
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.85mm
Thickness of Alu: 0.85mm

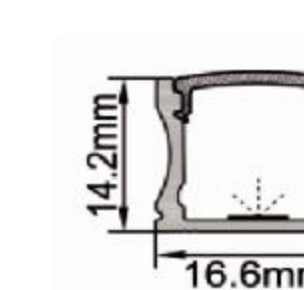


IC-061W-AP1714
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.85mm
Thickness of Alu: 0.85mm

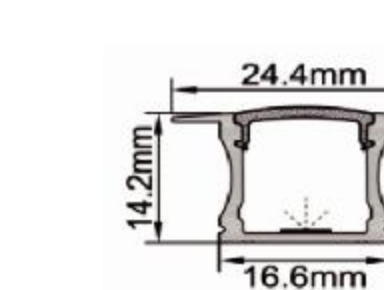

IC-012-AP2010
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.85mm
Thickness of Alu: 0.80mm

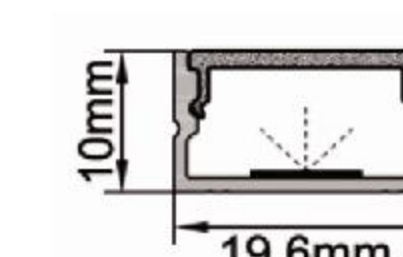


IC-012W-AP2010
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.85mm
Thickness of Alu: 0.80mm

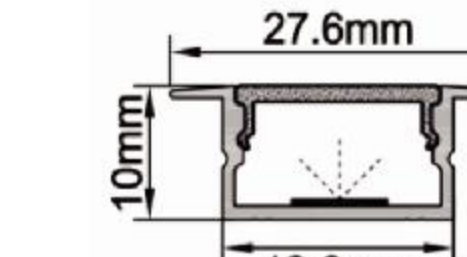


IC-065-AP2015
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.85mm
Thickness of Alu: 0.75mm




IC-065W-AP2015
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.85mm
Thickness of Alu: 0.75mm

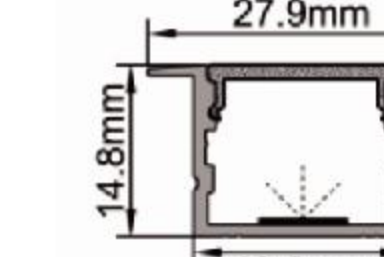


IC-177-AP2018
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.85mm
Thickness of Alu: 0.70mm

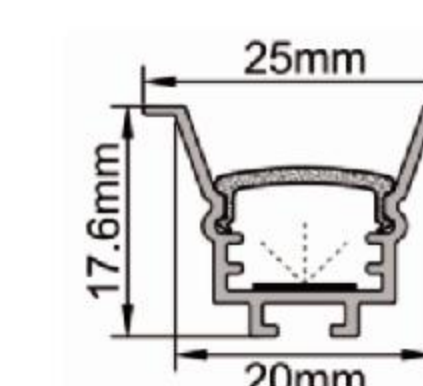


IC-354-AP5136
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.90mm
Thickness of Alu: 0.95mm

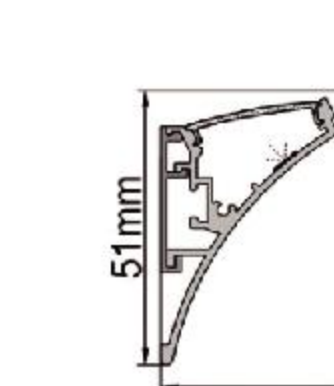

IC-047-AP6037
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.80mm
Thickness of Alu: 1.30mm

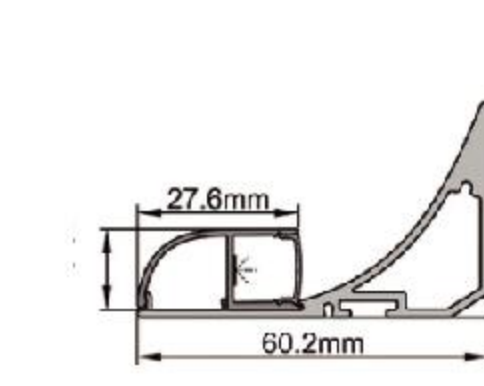



IC-151-AP2843
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.80mm
Thickness of Alu: 1.05mm

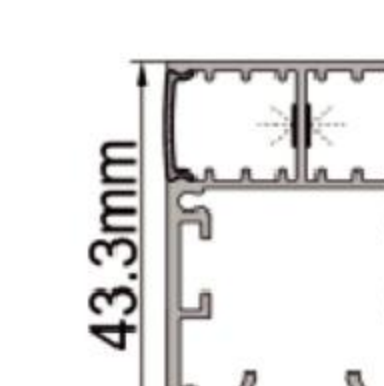


TRACK LIGHT




IC-712-AP4816
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.90mm
Thickness of Alu: 1.30mm

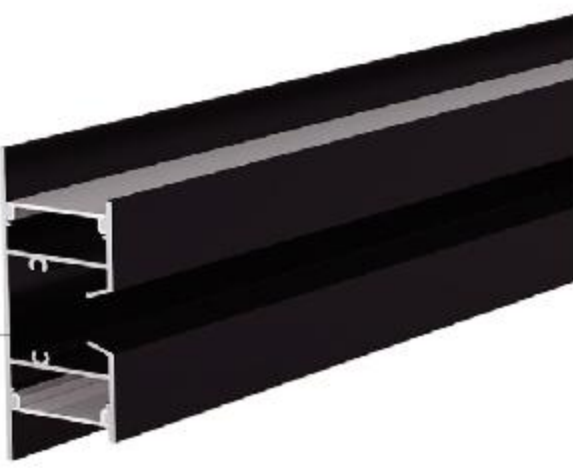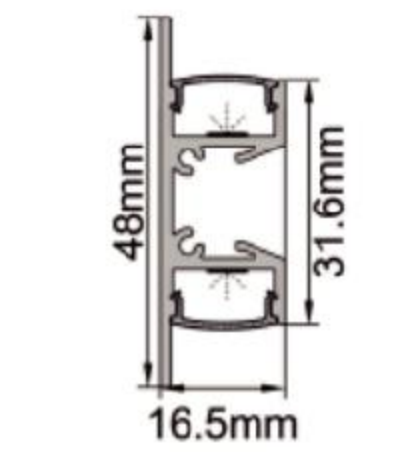


IC-150-AP7526
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 1.00mm
Thickness of Alu: 1.30mm

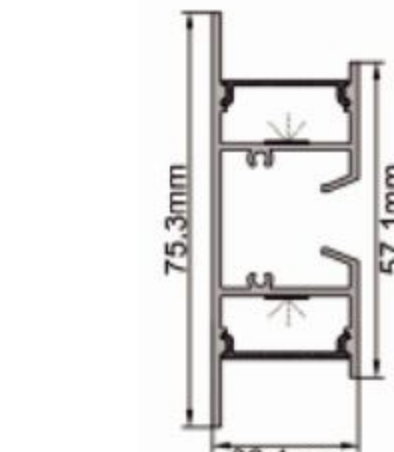


IC-729-SS3922
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.80mm
Thickness of Alu: 1.80mm

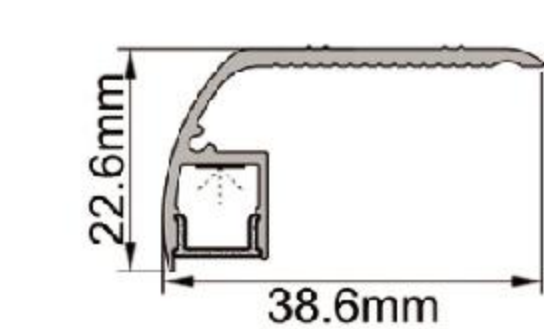


IC-733-SS6327
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.75mm
Thickness of Alu: 2.50mm

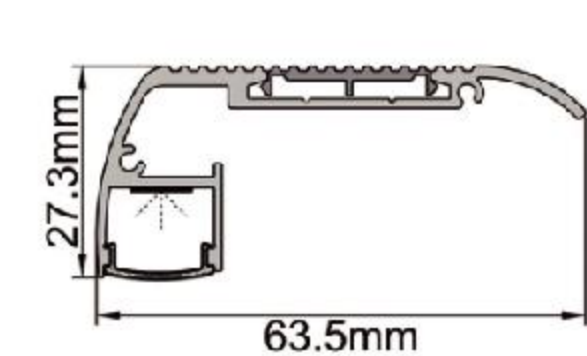


IC-212-UL2111
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 2.60mm
Thickness of Alu: 1.15mm

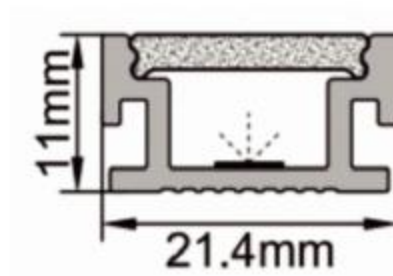


IC-212W-UL2111
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 2.60mm
Thickness of Alu: 1.15mm

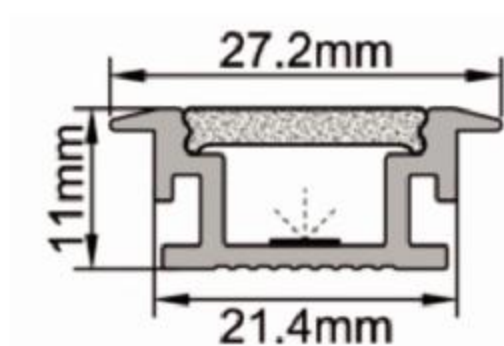


IC-231-UL2126
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 2.60mm
Thickness of Alu: 1.25mm

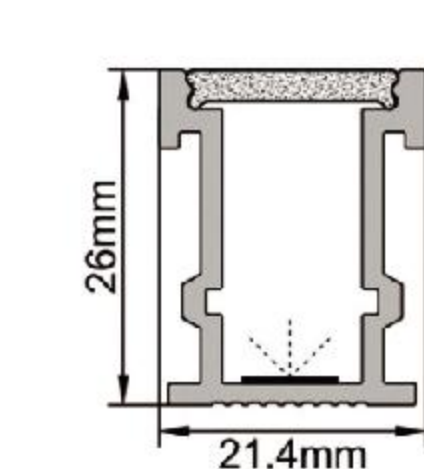


IC-233-UL3020
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 3.00mm
Thickness of Alu: 1.40mm

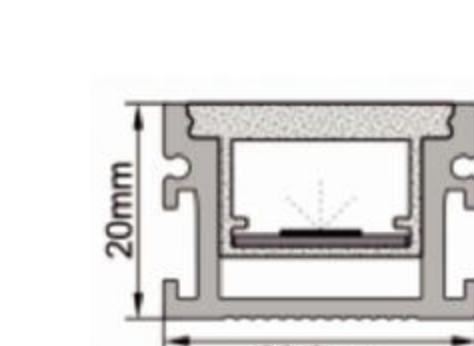


IC-338V-PE4226
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.75mm
Thickness of Alu: 1.20mm

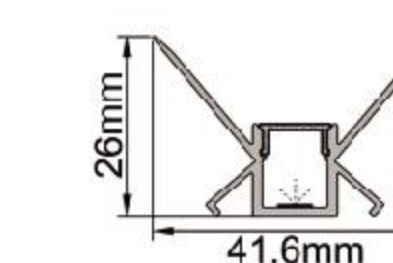


IC-338N-PE4821
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.75mm
Thickness of Alu: 1.20mm

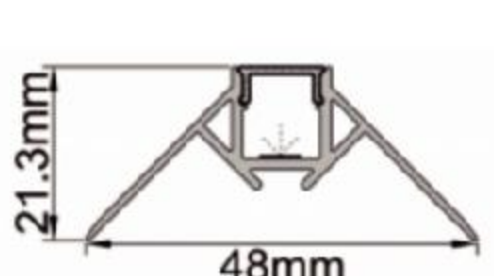


IC-330UP-PE1313
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.75mm
Thickness of Alu: 0.95mm

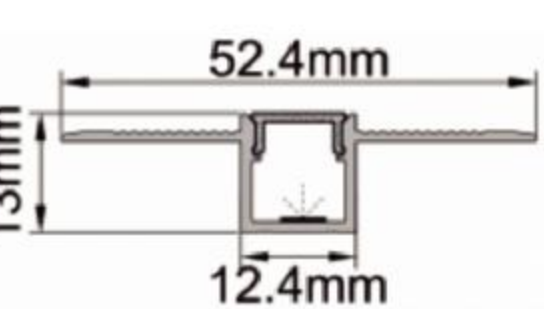


IC-303UP-PE2313
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.85mm
Thickness of Alu: 0.95mm

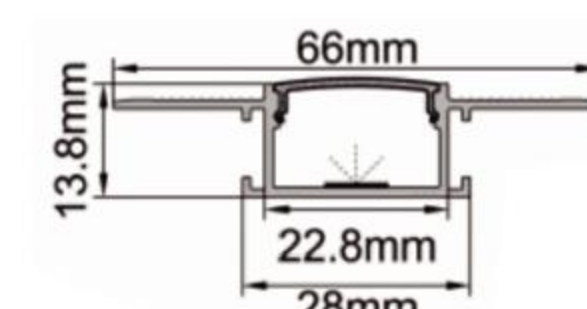


IC-371UP-PE7518
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 1.30mm
Thickness of Alu: 1.20mm

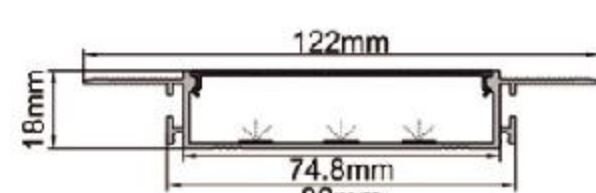


IC-318UP-PE5241
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.90mm
Thickness of Alu: 1.30mm

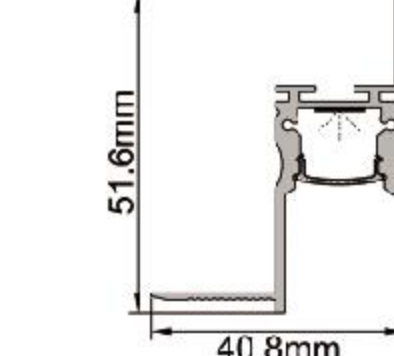

IC-315UP-PE9035
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.90mm
Thickness of Alu: 1.20mm

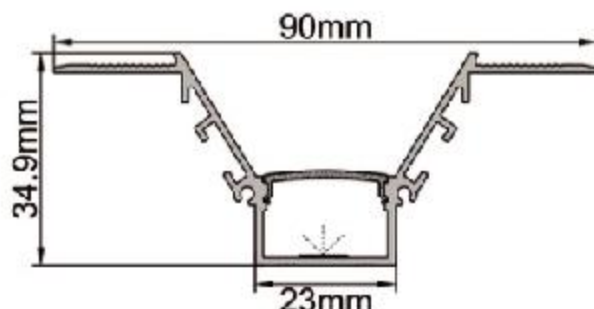


IC-363UP-PE10843
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.90mm
Thickness of Alu: 1.30mm

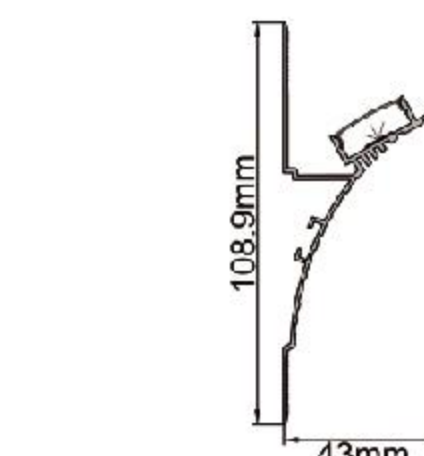


TRACK LIGHT




IC-328-PE15040
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.90mm
Thickness of Alu: 1.20mm

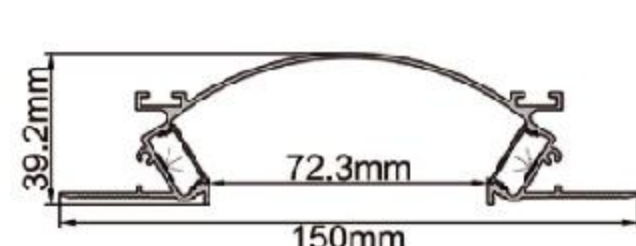

IC-64-PE10545
PC Ice white diffuser mask
"A" Alu+Silky silver finish
Thickness of PC: 0.90mm
Thickness of Alu: 1.20mm

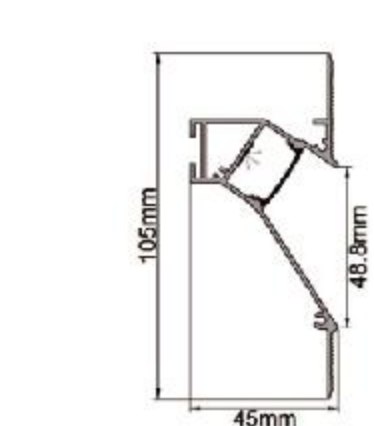

Reflective silicone
"A" Alu+Silky silver finish
Thickness of PC: 1.40mm
Thickness of Alu: 1.20mm

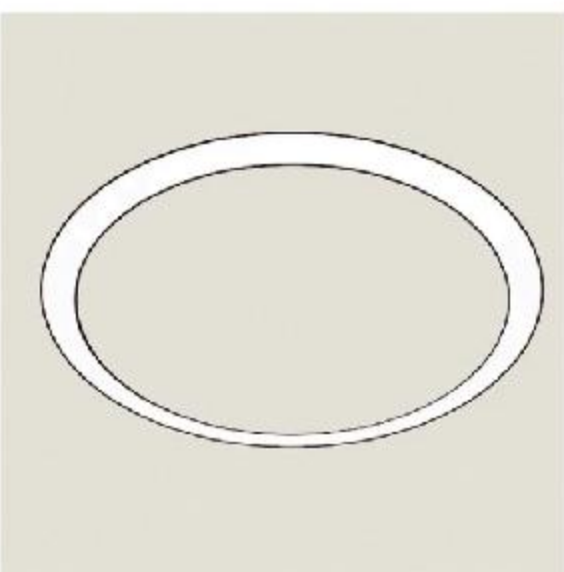


Reflective silicone
"A" Alu+Silky silver finish
Thickness of PC: 1.40mm
Thickness of Alu: 1.20mm




Reflective silicone
"A" Alu+Silky silver finish
Thickness of PC: 1.40mm
Thickness of Alu: 1.20mm



Reflective silicone
"A" Alu+Silky silver finish
Thickness of PC: 1.40mm
Thickness of Alu: 1.20mm

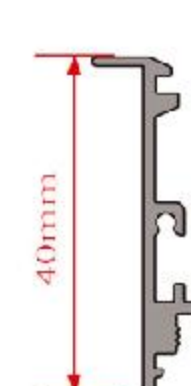

Reflective silicone
"A" Alu+Silky silver finish
Thickness of PC: 1.80mm
Thickness of Alu: 1.20mm

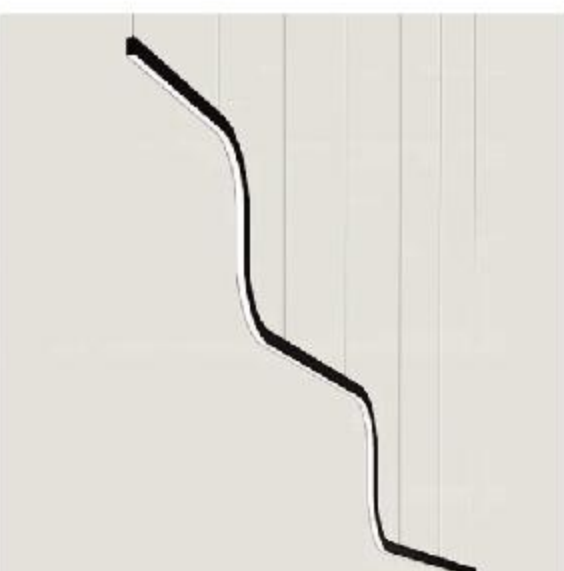

Reflective silicone
"A" Alu+Silky silver finish
Thickness of PC: 1.80mm
Thickness of Alu: 1.20mm

